

GEOMAX

GEOMAX GENERAL CATALOG

PART OF
HEXAGON



geomax-positioning.com/en-us

©2020 Hexagon AB and/or its subsidiaries and affiliates. All rights reserved.

Visit our website to find your local distributor: geomax-positioning.com

GeoMax, part of Hexagon, has rapidly gained the confidence of its partners and built up a strong network of resellers worldwide. The confidence was won over by our knowledge of user needs in their everyday environment, the quality and performance of our product range, a large service offering, tailor-made technical trainings and a proximity-oriented business approach.

Our success also comes from our visionary approach to Software and Data management. While most major players were offering solutions on Windows CE, GeoMax introduced the world's first Android-enabled software: X-PAD. X-PAD provides flexibility to everyone to digitize their work tasks, and is available in many versions for daily use (X-PAD Ultimate) on the field or in the office and technical workshops (X-PAD Office Fusion, Calmaster).

The driver for the strong and fast success of X-PAD was, and continues to be, developed for, and together with, GeoMax customers. This means it is tailored to their specific application needs in construction!

Our proximity, accessibility, expertise, X-PAD software and close services are the unique assets recognized and appreciated by our partners and customers around the world.

"Thanks to the regular Global Training sessions, we have the opportunity to discuss customers' needs, which are taken into account for future product development."

Dior Siteke
Authorized
GeoMax Dealer



"Thanks for giving New England Laser a product we can be proud to sell, the support to back it up, but mostly for making us feel appreciated for our efforts and part of the family."

Alan LaRose
Authorized
GeoMax Dealer



"Since we started working with GeoMax, our company has grown significantly. Working with the GeoMax team is very pleasant. They are always available to talk to people. This is the key differentiator to other companies."


Mario Silva
Authorized
GeoMax Dealer



2
Operational
centres

4
Strategic
partners

270
dealers

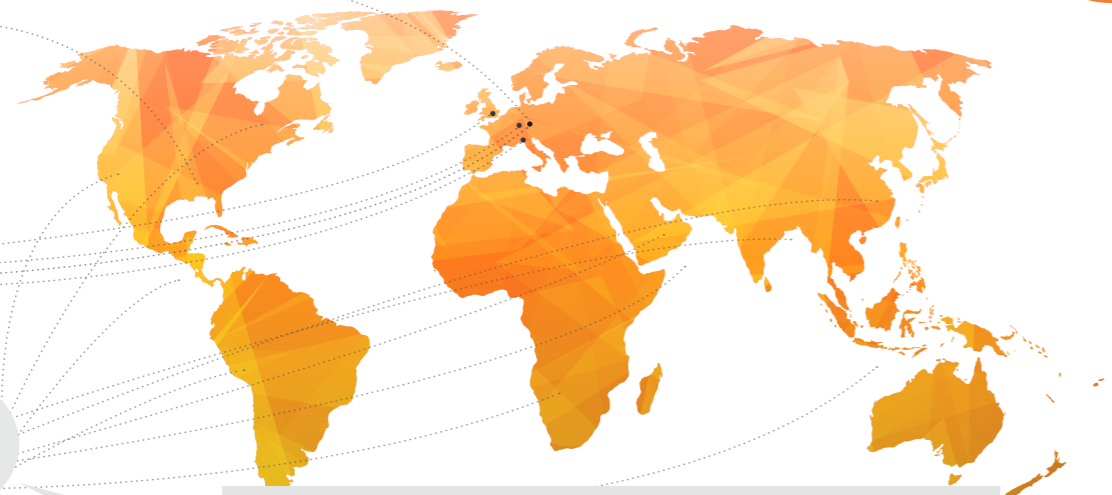

Our 270 specialist dealers will work with you to provide the right surveying equipment that best suits your needs, help you to work efficiently and supported by a dedicated service and training team.

Content



TOTAL STATIONS



GNSS RECEIVERS




FIELD CONTROLLERS



SOFTWARE




MICRO ROBOTIC SOLUTION



LEVELS




LASER ROTATORS & RECEIVERS

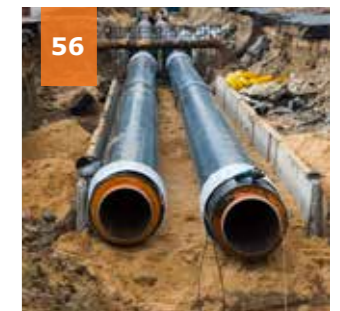

PIPE LASERS



MACHINE GUIDANCE



CABLE LOCATORS



ACCESSORIES & QUALITY MANAGEMENT

GEOMAX TOTAL STATIONS

Boost your daily performance with these easy-to-use and highly productive total stations for a wide range of applications, such as surveying, engineering and construction.



GeoMax Zoom90 Series

The ultimate one-man system

STREAM360: FULLY ROBOTIC

Scout: Scans the entire working area within seconds to quickly find the target.

TRack: Continuously tracks targets. Once locked onto, the instrument remains accurately aimed at the moving target.

AiM: Aims accurately at any prism, without needing to look through the telescope. Measurements are performed automatically with consistently high and repeatable dependability.

X-MOTION™ HYBRID DRIVES

The GeoMax Zoom90 incorporates highly innovative X-motion hybrid drives, promoting automation performance compared to conventional drives. It will follow your target at 90km/h at 100m distance.

NAVLIGHT™

Fitted as standard in the telescope, the NavLight is an efficient alignment aid, helping to speed up work while setting out. Its flashing red and yellow lights will guide you quickly and exactly to the line of sight.

ACCXESS™ EDM TECHNOLOGY

GeoMax's accXess EDM Technology provides leading reflectorless measurements up to 1,000m.

The extra small laser footprint and the sophisticated signal-processing technology ensures accuracy, regardless of the distance or conditions.

OPEN CONNECTIVITY

Combine your preferred software and field controller to perform remote control tasks with increased productivity. Zoom90 uses the Windows CE® operating system, which enables X-PAD and a variety of other field software to run, offering you freedom to choose software that best suits your needs. Full VGA color touch display will also provide you with superior performance and full graphic capability.

	Scout	TRack	Aim	accXess 10	accXess 5
Robotic (R)	✓	✓	✓	✓	✓

TECHNICAL DATA	
Accuracy	5", 2", 1"
Range with prism (standard mode)	3,500m
Accuracy (standard mode)	1mm + 1.5ppm
Range with prism (long mode)	10,000m
Accuracy (long mode)	5mm + 2ppm
Non-prism (range, accuracy)	1,000m/500m, 2mm + 2ppm*
Scout range	300m at round prism
TRack range	800m at round prism
AiM range	1,000m at round prism

* > 500m: 4mm + 2ppm



GeoMax Zoom70 Series

Your economic choice when price counts as much as performance

ONE-MAN TOTAL STATION

Equipped with the long-range Bluetooth® handle, the GeoMax Zoom70 transforms into a true one-man total station. It supports the advanced prism search, based on the GNSS position of the controller, mounted on the pole - GeoTRAIL. Due to its seamless integration into the X-PAD field software GeoTRAIL combines simplicity and high performance.

This solution convinces due to its independency of special, expensive and power-consuming active prisms. Zoom70 keeps your pole lightweight and convenient to carry all survey-day long.

FULL CONNECTIVITY

The Zoom70 meets all your connectivity needs. Use its built-in Bluetooth® for medium range data transfer or its Bluetooth® handle for high performance over long ranges. Either way, it is ideal for one-man robotic surveys.

Combine your preferred software and datalogger to perform remote control tasks with increased productivity. Zoom70 uses the Windows® CE operating system, which enables X-PAD and a variety of other powerful field software to be run, offering you freedom to choose software that best suits your needs.

TECHNICAL DATA	
Accuracy	5", 2", 1"
Range with prism (standard mode)	3,500m
Accuracy (standard mode)	1mm + 1.5ppm
Range with prism (long mode)	10,000m
Accuracy (long mode)	5mm + 2ppm
Non-prism (range, accuracy)	1,000m/500m, 2mm + 2ppm*
TRack range	800m at round prism
AiM range	1,000m at round prism

* > 500m: 4mm + 2ppm



GeoMax X-Pole

When TPS meets GNSS

WORKING SIMULTANEOUSLY WITH TPS AND GNSS

By combining the advantages of both systems, the new GeoMax X-Pole solution significantly improves performance and flexibility on the jobsite.

The seamless integration of X-Pole into the X-PAD field software allows a toggle between both measurement modes. Simply decide with the press of a button if you want to change from TPS to GNSS mode, such as when some points cannot be measured with TPS due to limited prism visibility. Once those points are measured, switch back to TPS mode.

This enhances the efficiency of the system since it eliminates the need for cumbersome and time consuming station setups. Zoom70/90's Track360 functionality enables following a moving prism. In case of loss of lock, the X-Pole solution immediately finds the pole position by obtaining the coordinates from the GNSS receiver mounted on top of the prism.

KEY FEATURES

- Simultaneous TPS and GNSS measurements during setup
- Change from TPS to GNSS measurement mode at the press of a button
- TPS and GNSS measurements stored in one common database
- Modular solution to be combined with any GeoMax GNSS receiver
- Flexible upgrade path even for robotic TPS and GNSS systems



GeoMax Zoom50 Series

Highest performance on every level



SUPERIOR ACCXESS EDM

With the proven accXess technology, the GeoMax Zoom50 features an intelligent distance measurement engine designed for outstanding speed and highest accuracy even on extremely long ranges. This means a wider operational coverage and significantly less time lost with switching setups.

EASY CONNECTIVITY

The Zoom50 manual total station includes an environmentally protected USB port, internal Bluetooth® and a cable connection port. This allows for fast, simple and dependable data transfer between the instrument and your PC or handheld controller using easy-to-connect Plug and Play technology.

COLOR TOUCH SCREEN

The extra-large 3.5" color touch screen with Q-VGA display provides for brilliant readability even in strong sunlight. Together with an extra-large high-resolution display, the easy-to-use graphical interface makes regular tasks, such as stake-outs, easier and more productive than ever before.

TECHNICAL DATA


Hz, V Standard deviation (ISO 17123-3)	1", 2", 5"
Compensator system	Quadruple-axis compensation
Measuring range with prism	10,000m
Accuracy on reflector (Fine/Tracking)	2 mm + 2ppm/3mm + 2ppm
Reflectorless range accXess5	>500m
Reflectorless range accXess10	>1,000m
Accuracy reflectorless	2mm + 2ppm (>500m 4mm + 2ppm)
Communication	USB, Bluetooth®, USB Host, RS232

GeoMax Zoom50 accXess5

Distance measurement to reflector and 500m reflectorless.

GeoMax Zoom50 accXess10

Distance measurement to reflector and 1,000m reflectorless.

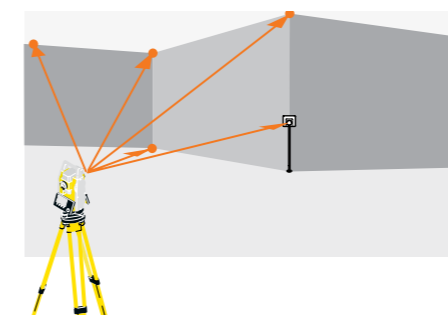


APPLICATIONS

Your Zoom50 total station comes with a complete range of powerful applications:

- Survey and coding
- Set-up with resection
- Set out
- Area 3D and volume
- Remote elevation
- Construction
- Reference line
- Reference arc
- Grid setout
- Column offset
- CoGo routines
- Missing line measurement
- Two prism offsets
- Road 2D
- Road 3D
- Traverse with on board adjustment

GeoMax Zoom40 Series

Fully open Windows CE® to operate the field software of your choice

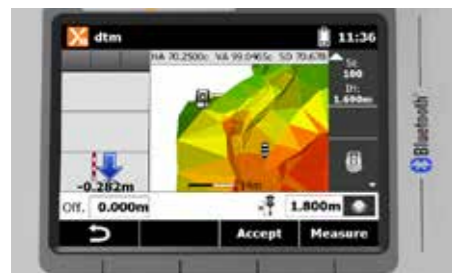

TOTALLY OPEN WINCE®

The GeoMax Zoom40 is a fully open WinCE® total station. Featuring X-PAD, GeoMax FieldGenius, Carlson SurvCE or any localised field software, the Zoom40 allows you to work as best fits your needs. WinCE® even allows you to run your own developments and to personalise your system.

COLOR TOUCH SCREEN

The extra-large 3.5" Q-VGA high resolution color and touch screen display provides brilliant readability even in strong sunlight. Together with an easy-to-use graphical interface, it makes the regular tasks, like stake-outs, easier and more productive than ever before.

FULLY FEATURED

All the openness and connectivity combined with a system featuring a color and touch display, neXus5, the long range non-prism measurement, and all your favourite Windows CE® applications make the Zoom40 the total station that "works when you do."

TECHNICAL DATA

Hz, V Standard deviation (ISO 17123-3)	2", 5"
Compensator system	Quadruple-axis compensation
Measuring range with prism	3,500m
Accuracy on reflector (Fine/Tracking)	2mm + 2ppm/3mm + 2ppm
Reflectorless range neXus5	500m
Accuracy reflectorless	2mm + 2ppm
Communication	USB, Bluetooth®, USB Host, RS232

GeoMax Zoom40 neXus5

Distance measurement to reflector and 500m reflectorless.



GeoMax Zoom25 Series

If you don't want to compromise on quality



ON BOARD SOFTWARE

Easily control your data with the flexible and easy-to-use on board software. Areas and volumes, reference elements, CoGo and more can be accessed using the large graphic display. Import and export in the format you want for total control and flexibility.

NEXUS™ EDM TECHNOLOGY

GeoMax's neXus5 EDM technology delivers high dependability and class-leading accuracy with and without a prism under difficult conditions. Reflectorless neXus5 EDM technology supports measurement ranges up to 500m.

BUILT FOR ALL ENVIRONMENTS


The GeoMax Zoom25 Series withstands the toughest environments. With the optional polar certification, the Zoom is individually tested at -30°C. With our extensive factory tests, you can be sure that GeoMax "works when you do."

TECHNICAL DATA

Hz, V Standard deviation (ISO 17123-3)	2", 5"
Compensator system	Quadruple-axis compensation
Measuring range with prism	3,500m
Accuracy on reflector (Fine/Tracking)	2mm + 2ppm/3mm + 2ppm
Reflectorless range neXus5	500m
Accuracy reflectorless	2mm + 2ppm
Communication	USB, Bluetooth®, USB Host, RS232

GEO MAX ZOOM25 NEXUS5

Distance measurement to reflector and 500m reflectorless.

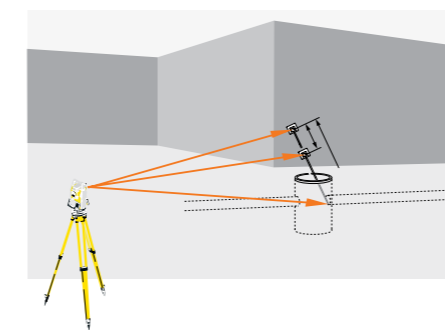

POWERFUL APPS

Every Zoom25 series instrument comes with a complete range of powerful applications:

- Survey and coding
- Set-up with resection
- Set out
- Area 3D and volume
- Remote elevation
- Construction
- Reference line
- Reference arc
- Grid setout
- Column offset
- CoGo routines
- Missing line measurement
- Two prism offsets
- Road 2D

GeoMax Zipp02

Digital theodolite for all your general construction tasks

CLOSING THE GAP

With vertical compensation and 2" accuracy the Zipp02 provides you with the precision required for your most demanding jobs at an affordable price without adding complexity. Various display modes, hold and set zero for horizontal angle, a variation of measurement units, simple distance measurement via stadia lines all make for easy operation with only six keys. Visible laser plummet enables you to set up over a point faster and easier than ever. The Zipp02 is the tool of your choice when it comes to checking angles, alignments, grade work and short range leveling.

TECHNICAL DATA	
Precision	2"
Magnification	30x
Compensator system	Automatic vertical compensator User set on/off
Display	Double side large character back-lit LCD
Keypad	Numeric with 3 programmable function
Keys	6 one-touch button functions
Operation period w/o laser plummet	36h



GEOMAX GNSS RECEIVERS

Ensure ultimate reliability with GeoMax GNSS systems under the most severe conditions. Providing true cost-effectiveness, these systems are equipped with the latest GNSS technology in the field to increase your productivity and taking your performance to the new level.



GeoMax Zenith40

Experience the full GeoMax technology



SUPERIOR POSITIONING

Take advantage of NovAtel's latest fully-featured OEM 719 measurement engine. It enables you to receive multi-frequency signals from all existing satellite systems worldwide. Struggles with canopy - like working under trees, or inaccurate results because of multipath signals are significantly improved due to the enhanced GeoMax Q-Lock Pro RTK which also reduces the time-to-fix.

Also on board of the Zenith40, Hexagon's TerraStar Precise Point Positioning (PPP) service that provides C-Pro correction data at centimetre level quality all around the globe. This service significantly enhances your productivity, as it eliminates the need of a network connection and reference from a data base station. Furthermore, no need to worry about reference frames anymore. The PPP position is provided within the coordinate system.

The GeoMax Q-Lock Pro algorithm automatically detects available correction services and selects the one providing the highest accuracy.



OPEN AND FLEXIBLE CONFIGURATION


The Zenith40 provides greatest flexibility. No matter if you want to run GeoMax X-PAD Ultimate on a dedicated GeoMax field controller or your preferred software on your own devices, this GNSS antenna allows you to work in the way that best fits your needs. Zenith40 can either be fully configured within the field software or with the Zenith Manager, a stand-alone application available for Windows and Android operating systems. This enables you to configure your antenna without using the field controller.

Being freely available on the Google Play store the latest version of Zenith Manager can be downloaded at any time and used on any Android based device, such as mobile phones or tablets.

The innovative and unique QR-iConnect functionality speeds up your connection process. Forget the times of tedious sensor search and selection by toggling through extensive device lists. Simply scan and go!

TECHNICAL DATA	
Channels	NovAtel OEM7, 555 channels, multi-frequency / -constellation
Satellite signals	GPS L1, L2, L2C, L5 GLONASS L1, L2, L2C, L3* BeiDou B1, B2, B3* (opt) Galileo E1, E5a, E5b, AltBOC, E6* (opt); QZSS L1, L2C, L5, L6* (opt); NavIC L5*
Positioning rate	5 Hz, 20 Hz (opt)
Accuracy RTK (rms)**	Hz 8 mm + 1 ppm V 15 mm + 1 ppm
Accuracy Static (rms)**	Hz 3 mm + 0.5 ppm V 5 mm + 0.5 ppm
Accuracy Static - long (rms)**	Hz 3 mm + 0.1 ppm V 3.5 mm + 0.4 ppm
Accuracy TerraStar C Pro PPP (rms)**	Hz < 2.5 cm V < 5 cm

* Glonass L3, BeiDou B3, Galileo E6, QZSS L6 and NavIC L5 are foreseen to be provided through future firmware upgrade.
** Measurement precision, accuracy, reliability and time for initialisation are dependent upon various factors including number of satellites, observation time, atmospheric conditions, multipath etc. Figures quoted assume normal to favourable conditions. A full BeiDou and Galileo constellation will further increase measurement performance and accuracy.

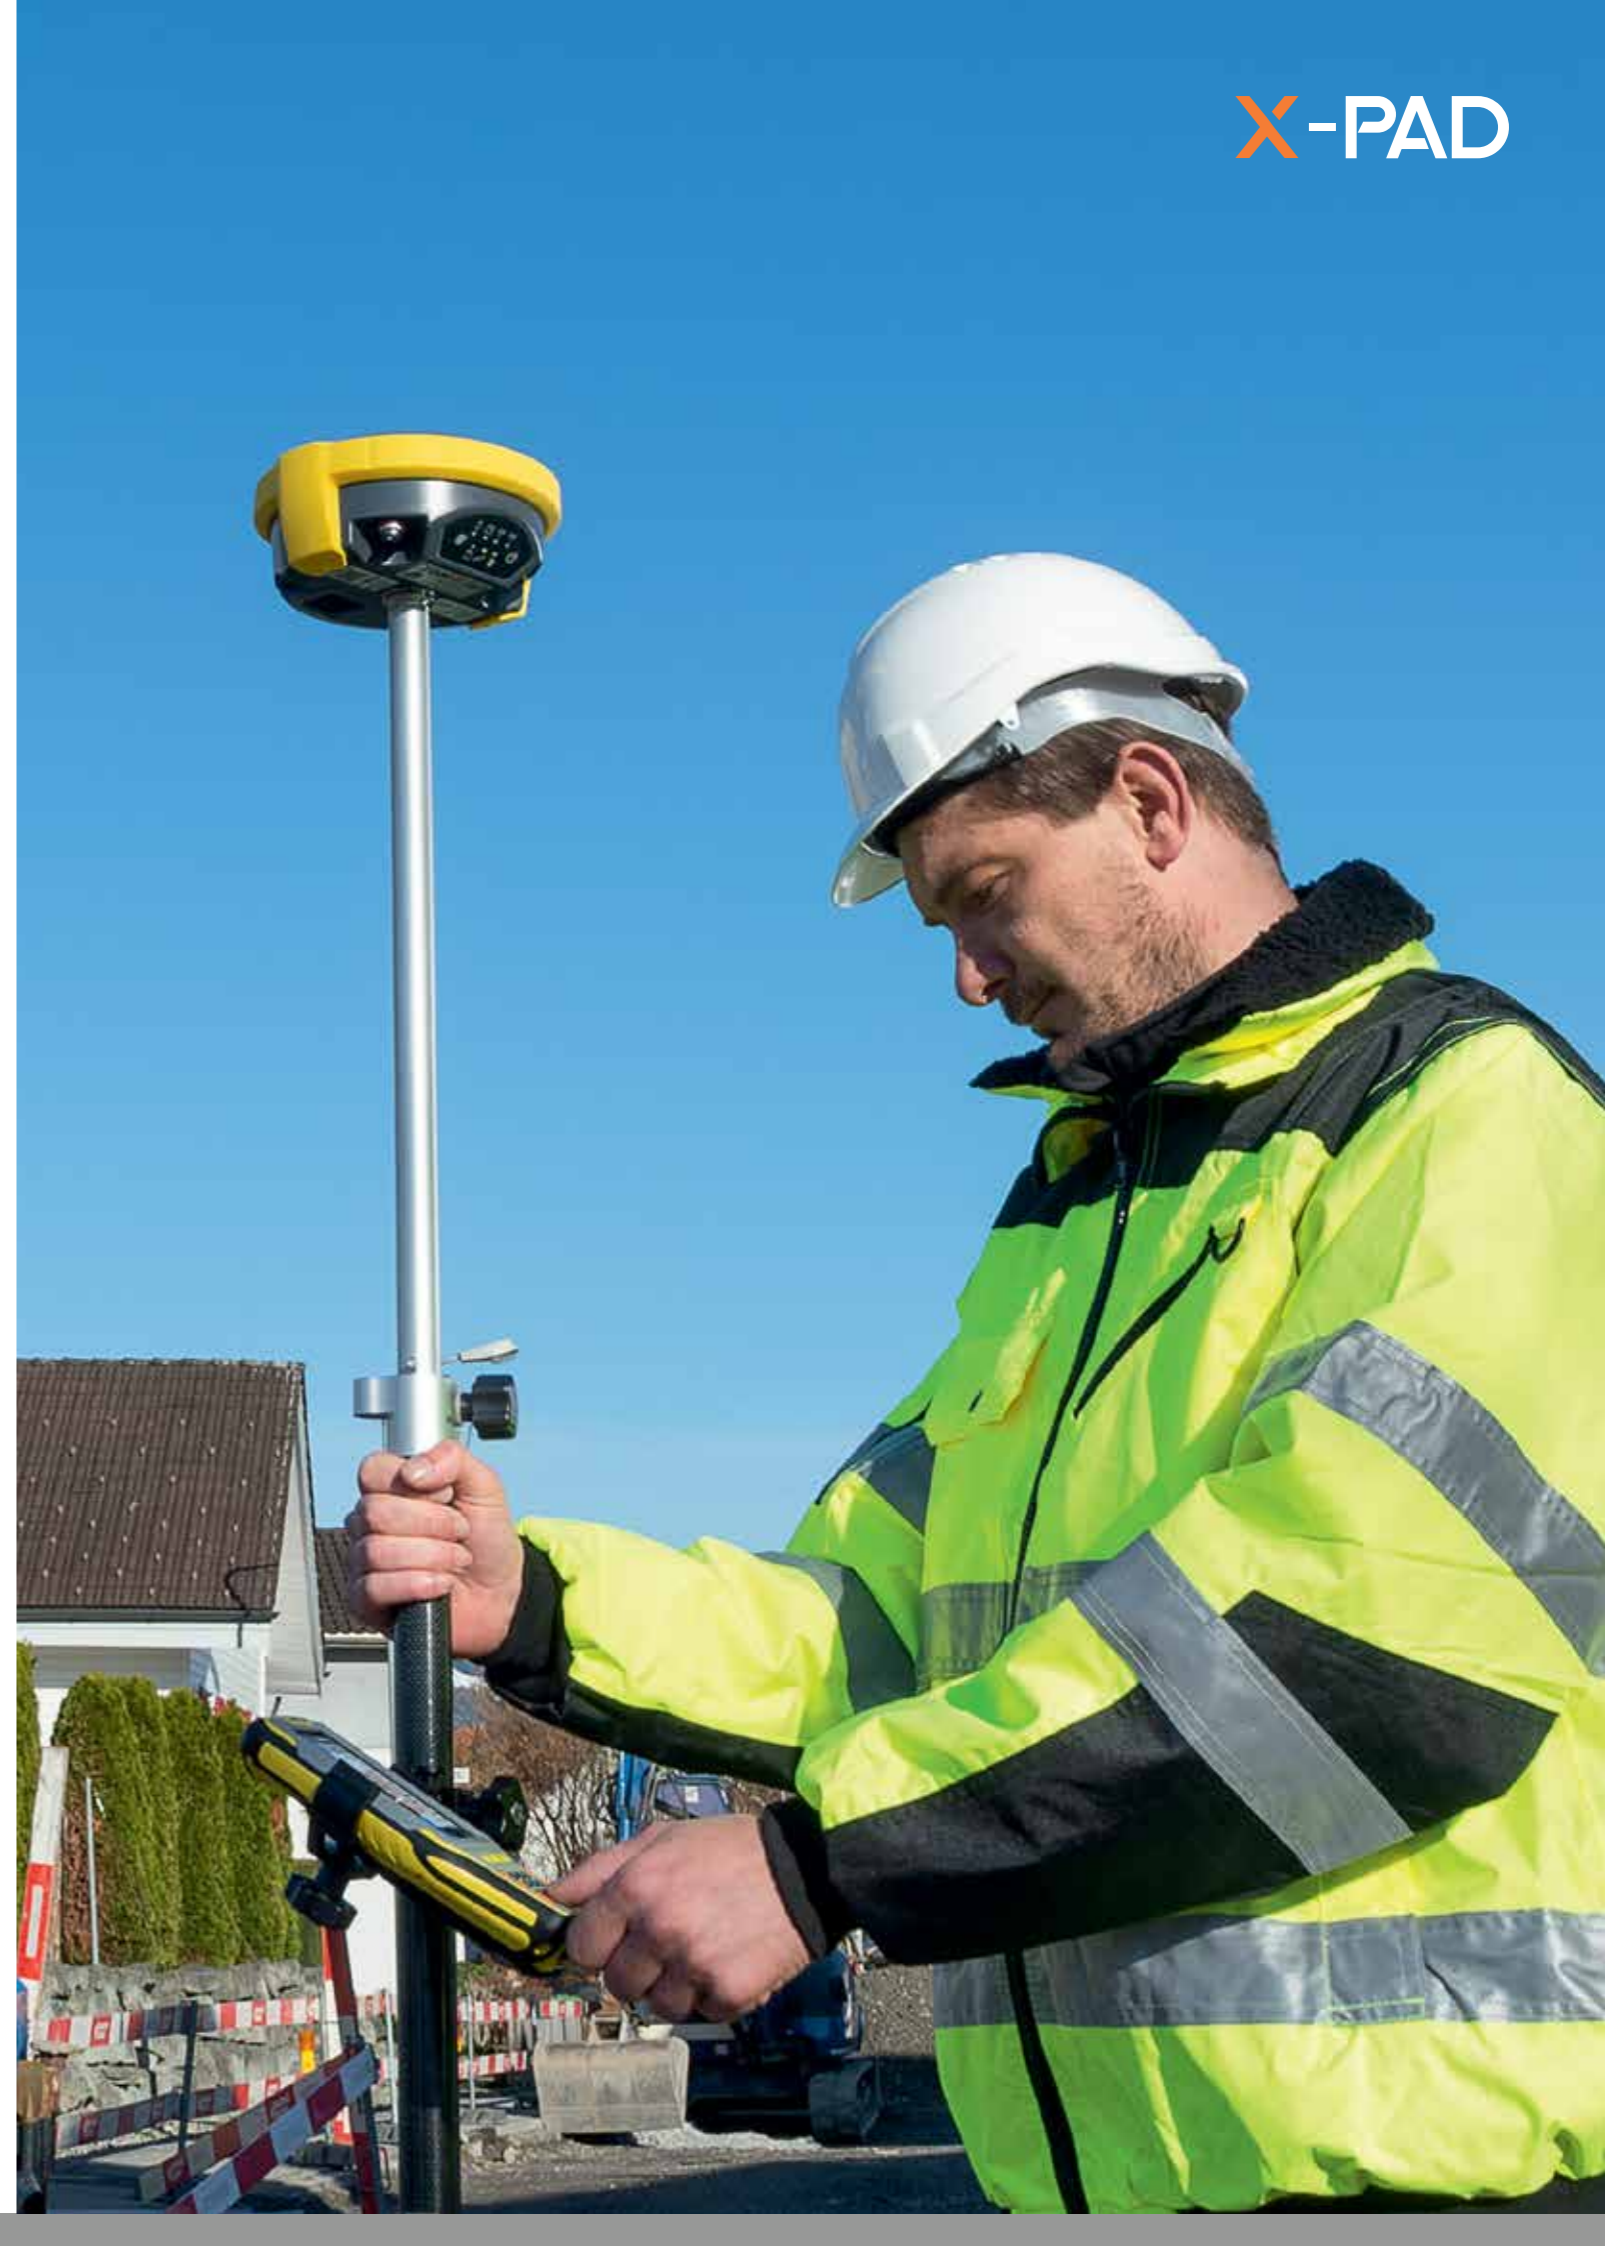

GeoMax Zenith35 Pro Series

Full spectrum of satellite signals, unlimited connectivity and Tilt&Go functionality



FULL CONNECTIVITY

- Access from any device connected to the internet, independent of your location
- Connect up to 10 rovers simultaneously via GSM with Zenith35 Pro DynDNS technology
- 3.75G GSM for NTRIP connections
- Powerful UHF for base-rover setups
- USB port for data transfer
- Serial port for data output

FULL FREEDOM

A corner of a building or even a gully under a parked car? The unique GeoMax Zenith35 Pro Tilt&Go (TAG) functionality allows you to measure points where a vertical placement of the pole is not possible, such as house corners.

No longer worry about keeping your pole strictly vertical, just Tilt&Go! Seamlessly integrated into the field software, the Zenith35 Pro TAG offers two modes perfectly adapting to the measurement situation.

- TAG Single - Measure points with pole tilted up to 15° with only a press of a button.
- TAG Dual - Measure points with the pole tilted up to 30° independent from magnetic field discrepancies.



FULL SKY

- 555 channels multi constellation and multi frequency, ready for all today's and tomorrow's GNSS systems, including Galileo and BeiDou.
- NovAtel® on board - Cutting-edge GNSS technology

TECHNICAL DATA	
Channels	555, multi-frequency
Satellite signals	GPS L1,L2,L2C,L5; GLONASS L1,L2,L3*;BeiDou B1,B2, B3** Galileo E1,E5a,E5b, AltBOC,E6**; EGNOS;WAAS,MSAS,GAGAN, QZSS
Positioning rate	5Hz, 20Hz****
Accuracy RTK (rms)***	H 8mm + 1ppm V 15mm + 1ppm
Accuracy Static (rms)***	H 3mm + 0.5ppm V 5mm + 0.5 ppm
Accurac Static - long (rms)***	H 3mm + 0.1ppm V 3.5mm + 0.4ppm

*Glonass L3 will be provided through future firmware upgrade.
**Believe to comply. Subject to ICD description availability. The position accuracies depend on various factors including the number of satellites, geometry, ionospheric, conditions, multipath, etc
***Measurement accuracy and reliability are dependent on various factors including satellite geometry, obstructions, observation time, ionospheric conditions, multipath, etc.



GeoMax Zenith16

Flexible Field Solution with Dependable Results



SEAMLESS INTEGRATION

The Zenith16 seamlessly integrates with all GeoMax field controllers and X-PAD software. With the option to include an onboard SATEL radio, the Zenith16 gives you the flexibility to meet your needs.

NOVATEL® ON BOARD

Equipped with Measurement Engines from NovAtel®, a leading provider of high precision GNSS, Zenith16 receivers provide the maximum performance.

Q-LOCK™ TECHNOLOGY

The Q-Lock™ technology tracks all satellites with the highest available signal strength and performs regular independent checks to ensure that you can work even in challenging environments such as urban canyons or under heavy foliage.

TECHNICAL DATA

Channels	181, dual frequency / multi-constellation
Satellite signals	GPS L1, L2, L2C; GLONASS L1, L2; SBAS
Positioning rate	5Hz
Accuracy RTK (rms)*	H 10mm + 1ppm V 20mm + 1ppm
Accuracy Static (rms)*	H 5mm + 0.5ppm V 10mm + 0.5ppm
Accuracy Static - long (rms)*	H 3mm + 0.1ppm V 3.5mm + 0.4ppm

* Measurement accuracy and reliability are dependent on various factors including satellite, geometry, obstructions, observation time, ionospheric conditions, multipath, etc. Figures quoted assume normal to favourable conditions.



X-PAD



GeoMax GNSS antennas

	Zenith15	Zenith35 Pro	Zenith35 Pro TAG	Zenith40
NOVATEL MEASUREMENT ENGINE				
RTK technology	Q-Lock Pro™	NovAtel AdVance®		Q-Lock Pro™
Channels	120	555		555
GPS tracking	L1, L2, L2C	L1, L2, L2C, L5		L1, L2, L2C, L5
GLONASS tracking	L1, L2	L1, L2		L1, L2
BeiDou tracking	-	B1, B2, B3*		B1, B2, B3* (opt)
Galileo tracking	-	E1, E5a, E5b, AltBOC, E6*		E1, E5a, E5b, AltBOC, E6* (opt)
QZSS tracking	-	L1, L2C, L5, L6* (opt.)		L1, L2C, L5, L6* (opt.)
NavIC	-	L5*		L5*
Positioning rate	5Hz	5Hz	5Hz, 20Hz (opt)	5 Hz, 20 Hz (opt)
SBAS	EGNOS, WASS, MSAS, GAGAN	EGNOS, WAAS, MSAS, GAGAN		EGNOS, WAAS, MSAS, GAGAN
Precise Point Positioning (PPP)	-	-		Yes
TILT & GO				
Single / Dual Mode	-	-	Yes	-
ACCURACY (RMS)***				
Static H/V (mm + ppm)	5 + 0.5 / 10 + 0.5	3 + 0.5 / 5 + 0.5		3 + 0.5 / 5 + 0.5
RTK H/V (mm + ppm)	10 + 1 / 20 + 1	8 + 1 / 15 + 1		8 + 1 / 15 + 1
Static long H/V (mm + ppm)	3 + 0.1 / 3.5 + 0.4	3 + 0.1/ 3.5 + 0.4		3 + 0.1/ 3.5 + 0.4
COMMUNICATION				
GSM/GPRS module	Yes	Yes		Yes
UHF radio module	Microhard (Opt.)	SATEL		SATEL (Opt.)
Bluetooth®	Yes	Yes		Yes
WiFi	-	Yes		-
Communication port	USB, serial and power	USB, serial and power		USB, serial and power
QR-iConnect	-	-		Yes
Zenith Manager	-	-		Yes
INTERFACES				
Data recording	Removable microSD card	Removable microSD card and 8 GB internal memory		Removable microSD card
GSM / TCP / IP	Removable SIM card	Removable SIM card		Removable SIM card
PicPoint / X-Pole support	Yes	Yes		Yes
POWER SUPPLY				
External power / Internal battery	Lemo® plug / Removable, Li-Ion 2.6 Ah	Lemo® plug / Removable, Li-Ion 3.4 Ah		Lemo® plug, Removable, Li-Ion 2.6 Ah
Smart battery	-	Yes		-
Operating time (static/rover)	7.5 h / 5 h	8h / 6h		9h / 6h
PHYSICAL SPECIFICATIONS				
Dimensions / Weight **	Height 95 mm, ø 198 mm / 1.07 kg	Height 131 mm, ø 161 mm / 1.17 kg		Height 95 mm, ø 198 mm / 1.14 kg
Operating temperature	-40°C to 65°C	-40°C to 65°C		-40°C to 65°C
Protection class / Humidity	IP68, 100%, condensing	IP68, 100%, condensing		IP68, 100%, condensing
Vibration	Mechanical stress resistant according ISO 9022-36-05	ASAE EP455 Section 5.15.1 Random, MIL-STD-810G, method 514.6E-I		Mechanical stress resistant according to ISO 9022-36-05
Shock	Withstands 2m topple over onto hard surface	Withstands 2 m drop onto hard surface		Withstands 2 m drop onto hard surface
WARRANTY				
Standard Warranty	1 year	1 year		1 year
Extendable warranty	Yes	Yes		Yes


* Glonass L3, BeiDou B3, Galileo E6, QZSS L6 and NavIC L5 are foreseen to be provided through future firmware upgrade.

** Depending on device configuration; w/o battery

*** Measurement accuracy and reliability are dependent on various factors including satellite geometry, obstructions, observation time, ionospheric conditions, multipath, etc. Figures quoted assume normal to favourable conditions.

GEOMAX FIELD CONTROLLERS

Based on an open platform, just use the software that best fits your requirements and rely on the robustness and precision of these easy-to-use devices.

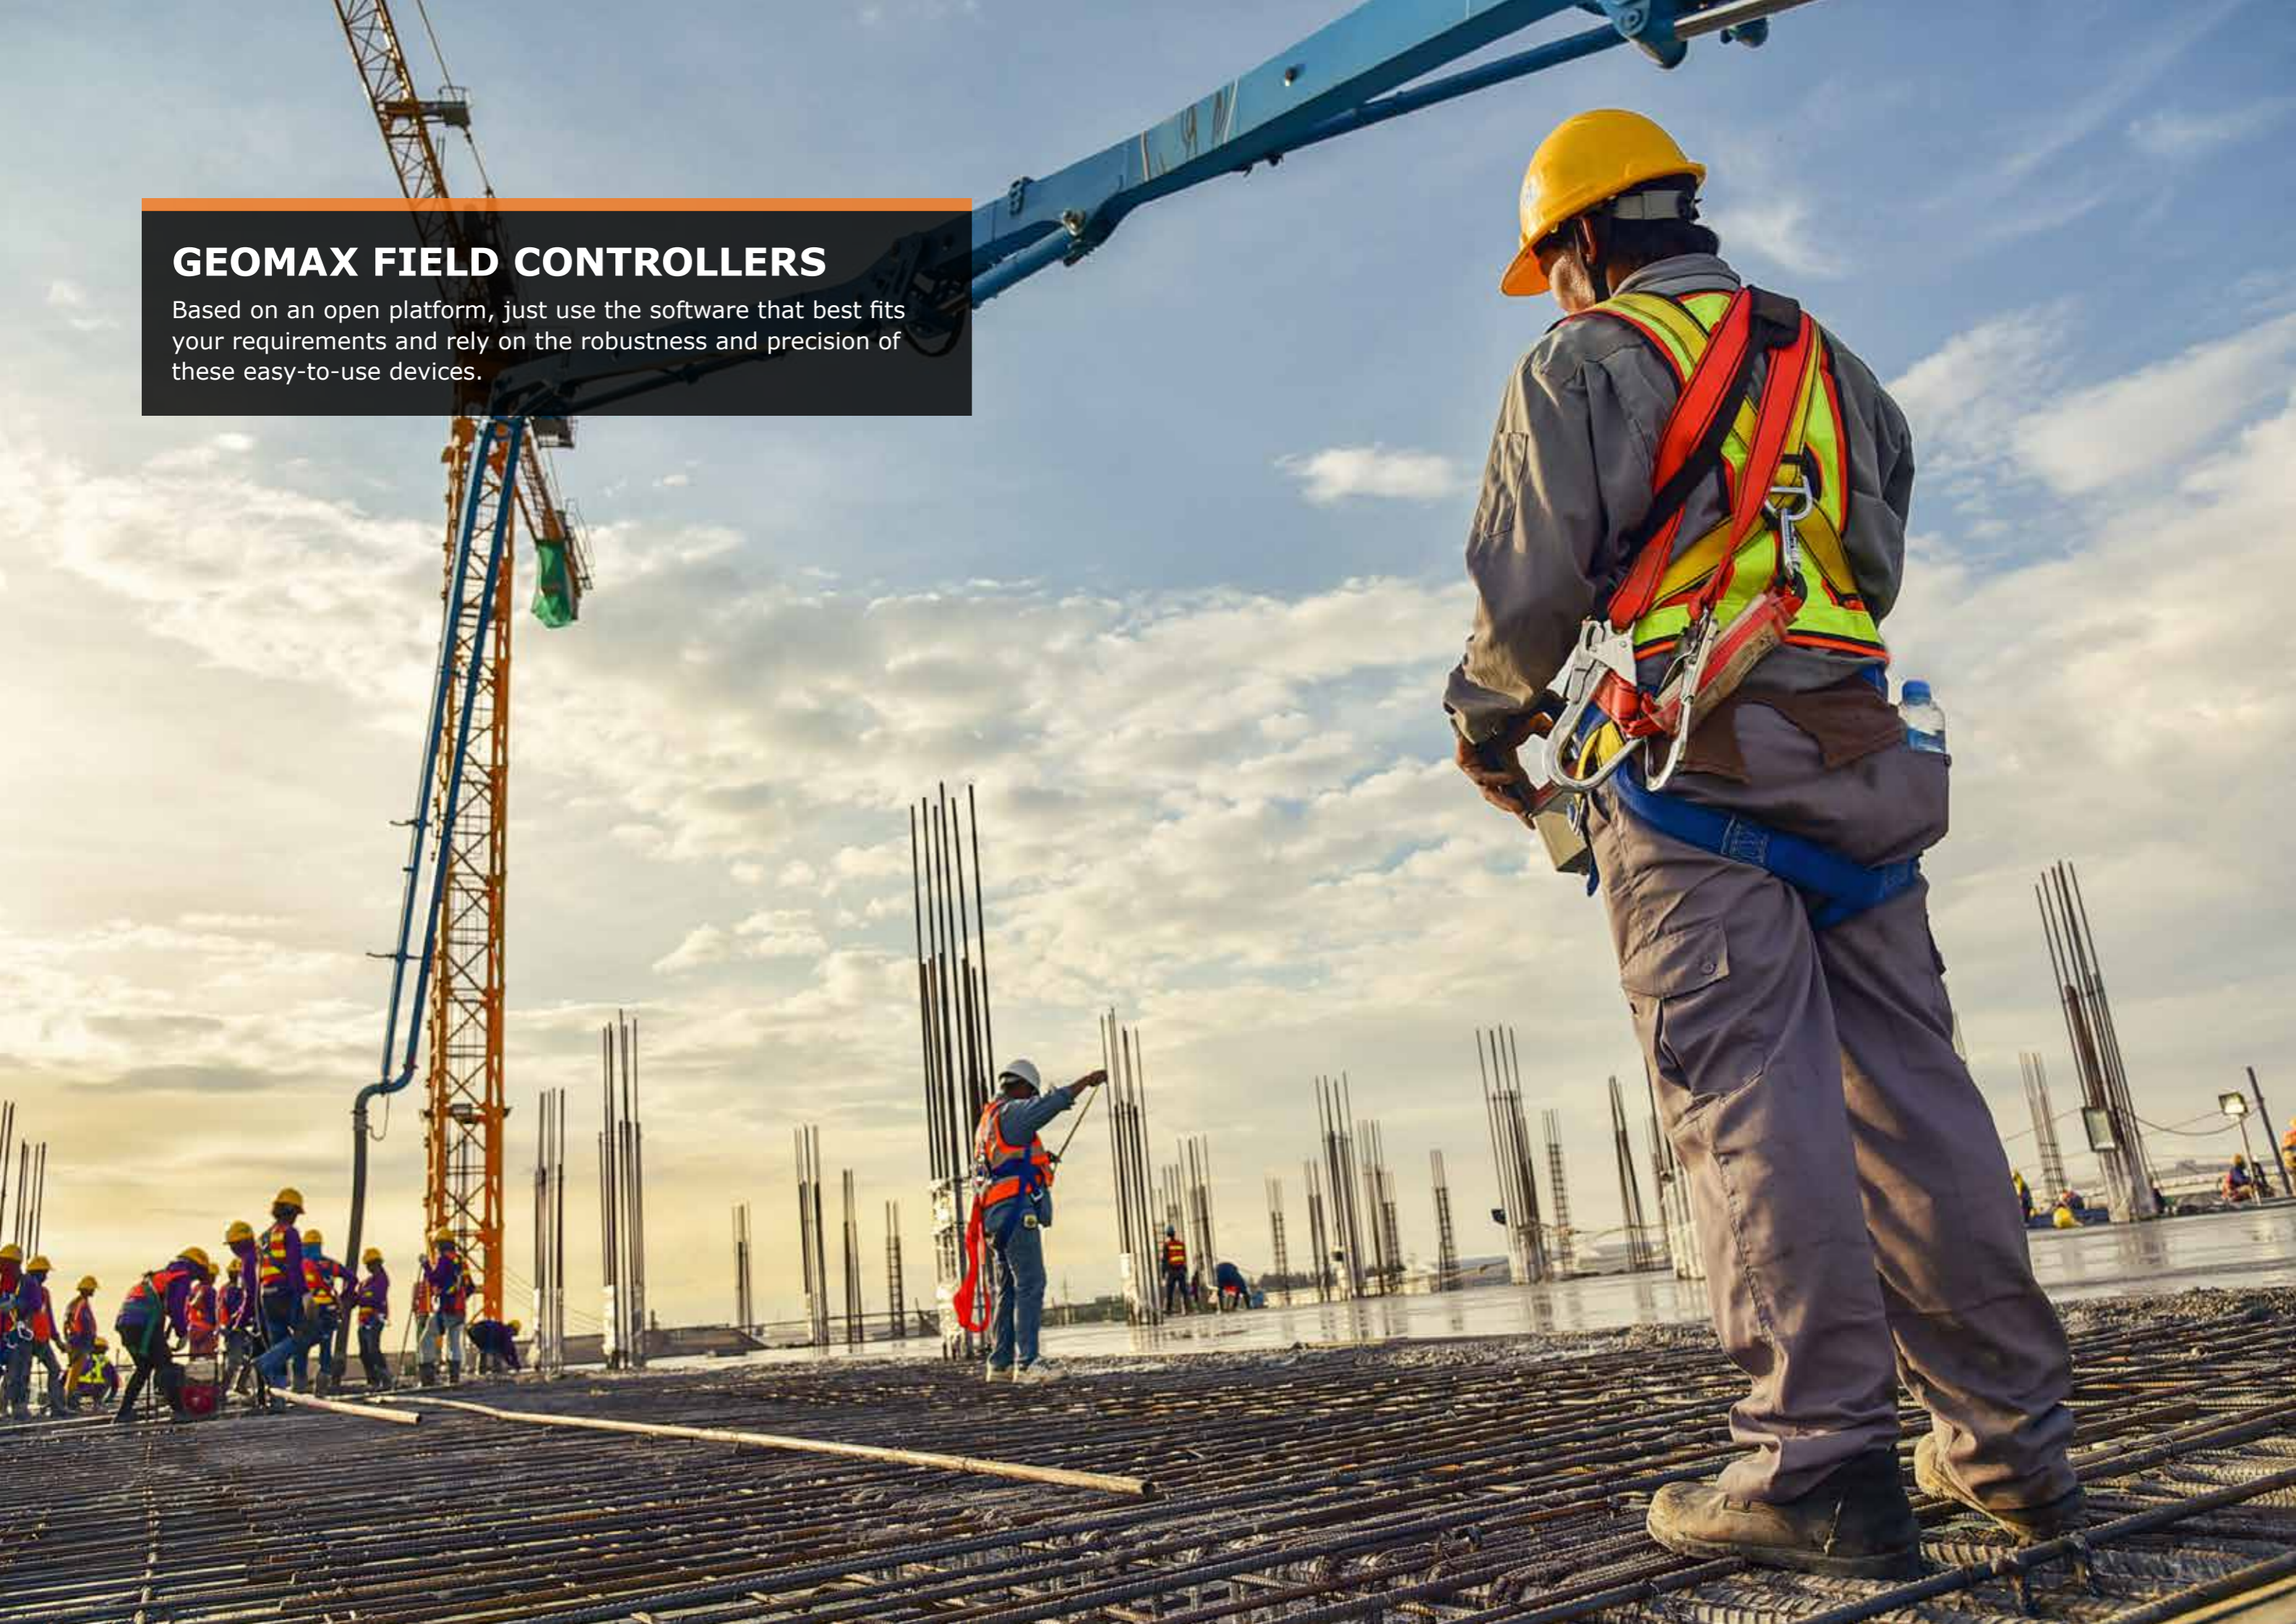

GeoMax ZeniusX A

The X-PAD Ultimate user experience



POWERFULL AND ROBUST

Operating on Android™ the ZeniusX field controller is versatile and fully equipped to make data collection easy. A clean and detailed site documentation is guaranteed thanks to the 8MP high resolution camera.

The rugged device is dust-tight and withstands temporarily immersion under water (IP67). Customisable keys for quick access and a large, crystal clear display make your job more convenient.

YOUR PERFECT MATCH IN THE FIELD

The dedicated GeoMax field software X-PAD Ultimate and the ZeniusX are the perfect match when it comes to your everyday job in the field.

KEY FEATURES:

- Android Operating System
- 4G LTE cellular modem
- 4.3" wide VGA sunlight readable display
- 8 megapixel camera with auto-focus
- Large memory - 1GB RAM, 8GB storage

- MicroSD card support
- Class 2 Bluetooth® 4.1 + Bluetooth® LT, WiFi and USB Typ-C connectivity
- Multi-constellation GNSS
- Light weight – 490g including battery
- Vibration resistant according MIL standard

X-PAD



TECHNICAL DATA	
Processor	Qualcomm(R) Snapdragon™ Quad Core, 1.1 GHz
Operating System	Android 6.0.1 (Marshmallow)
Memory	1 GB program memory; 8 GB storage capacity
Display	4.3" Wide-VGA sunlight readable TFT with a 480 x 800 resolution
Battery	Removable Li-Ion smart battery; 3400 mAh 7.4V 25.2 Wh
Operating time	Up to 15 hours
Navigation	Multi-constellation, single frequency. GPS/GLONASS/BeiDou
Features	WiFi, Bluetooth®, Inbuilt GPS, 4G LTE cellular modem, High speed USB Type-C OTG port, MicroSD Card slot
Camera	Auto focus, 8 MegaPixel with flash

GeoMax Zenius5 W

Versatile field controller



FULLY FEATURED, FULL FLEXIBILITY

The GeoMax Zenius5 W is a versatile handheld fully packed with everything needed to do the job. If you are looking

for flexibility in software and versatility in handling connections to hardware in the field or in the office, this unit is for you.

The on board 5MP camera helps with daily documentation tasks by taking

photos and storing them as notes. This rugged field Windows Mobile® handheld is built to meet GeoMax requirements for power, functionality and reliability, ensuring they always "work when you do."



X-PAD

TECHNICAL DATA	
Processor	TI Sitara™ AM335x running at 1 GHz
Operating system	Windows® embedded handheld 6.5 Professional
Memory	512MB program memory, 8GB storage capacity, MicroSD card slot
Display	Full VGA sunlight readable TFT with a 480 x 640 resolution
Battery	Removable Li-Ion smart battery; 3400 mAh 7.2V 24.48 Wh
Operating time	Up to 10 hours

TECHNICAL DATA	
Channels	72 channel u-Blox
Satellite signals tracked	GPS, GLONASS, BeiDou, Galileo; single frequency
RTK accuracy	2.5m CEP (Auto.)/2.0m CEP (SBAS)
SBAS	WAAS/EGNOS/MSAS/GAGAN
Features	WiFi, Bluetooth®, Inbuilt GPS, 4G LTE cellular modem, High speed USB Type-C OTG port, MicroSD Card slot
Camera	Auto focus 5 MegaPixel Dedicated camera key

Zenius5 W

ZeniusX A

USER INTERFACE		
Display	3.5" Full-VGA sunlight readable TFT with a 480 x 640 resolution	4.3" Wide-VGA sunlight readable TFT with a 480 x 800 resolution
Keypad	Customisable shortcut keys	Customisable shortcut keys
Operating System	Microsoft® Windows Embedded Handheld™ 6.5 Professional	Android 6.0.1 (Marshmallow)

OFFICE / CLOUD COMMUNICATION		
Wi-Fi	802.11 a/b/n	802.11 a/b/n
Cellular	3.75G cellular modem	4G LTE cellular modem
Five Band UMTS/HSPA + (WCDMA/FDD)	850/800,900, 1900 and 2100 MHz	850/800,900, 1900 and 2100 MHz LTE FDD: B1/B3/B5/B7/B8/B20 LTE TDD: B38/B40/B41 WCDMA: B1/B5/B8
Quad-Band GSM	850/900/1800/1900 MHz	850/900/1800/1900 MHz
USB	High speed USB-OTG port	High speed USB Type-C OTG port

STORAGE		
Internal	0.5 GB program memory; 8 GB storage capacity	1 GB program memory; 8 GB storage capacity
MicroSD	SDHC supported Micro SD card slot	SDHC supported Micro SD card slot
USB OTG	Mass-Storage device support	Mass-Storage device support

SYSTEM		
Processor	TI Sitara™ AM335x, 1 GHz	Qualcomm® Snapdragon™ Quad Core, 1.1 GHz
Battery power	Removable Li-Ion smart battery; 3400 mAh 7.4V 25.2 Wh	Removable Li-Ion smart battery; 3400 mAh 7.4V 25.2 Wh
Operating time	Up to 10 hours	Up to 16 hours

INSTRUMENT COMMUNICATION		
Bluetooth®	Class 2 Bluetooth® 2.1 EDR	Class 2 Bluetooth® 4.1 + Bluetooth® LE
Connection	RS232, Industrial standard DB9	USB Type-C

DOCUMENTATION		
Camera	Auto focus, 5 MegaPixel	Auto focus, 8 MegaPixel with flash

NAVIGATION		
GNSS Solutions	Multi-constellation; single frequency. GPS/QZSS, GLONASS, BeiDou, Galileo; SBAS: WAAS, EGNOS, MSAS, GAGAN	Multi-constellation; single frequency. GPS/GLONASS/BeiDou

PHYSICAL		
Dimensions	192*93*42 mm	194*90*39.5 mm
Weight	595 g (Including Battery)	585 g (Including Battery)
Operating temp.	-30°C to +60°C	-30°C to +60°C
Protection class	IP65 dust-tight and withstands water jets	IP67 dust-tight and withstands temporarily immersion under water
Humidity	5 to 95% non-condensing	5 to 95% non-condensing
Vibration	Random: MIL-STD-810G, Method 514.6E-I Sinusoidal: ASAE EP455 Section 5.15.1	Random: MIL-STD-810G, Method 514.6E-I Sinusoidal: ASAE EP455 Section 5.15.1
Shock	Withstands 1.2 m drop on hard surface	Withstands 1.2 m drop on hard surface



GeoMax FZ-M1 & Zenius800

For your success on the modern job site



ZENIUS800 - EQUIPPED FOR YOUR EVERYDAY TASKS

GNSS or TPS, stakeout or topographical survey - the Zenius800 is the optimal datalogger for every task in the field. Working with CAD drawings or 3D models is simple and intuitive, thanks to the big screen that provides an overview of the complete picture. Make changes directly in the field so no need to go back to the office. Uploading time for large data files is minimized thanks to the high-performance octaprocessor.

The tablet's internal Bluetooth connects to robotic total stations with radio handle up to a radius of 300m. This allows an uninterrupted remote workflow due to the stable Bluetooth connection.

FZ1-M1 - DESIGNED FOR PROFESSIONALS

The FZ-M1 is specially designed for field professionals like you - fully rugged to support the most severe weather conditions and equipped with a powerful processor, Windows 8.1 and Bluetooth. The FZ-M1 will boost your performance no matter the challenge you face.

FULLY RUGGED

These tablets do not need to hide outdoors. Their multi-touch and sunlight-viewable screen allows you to interact with it without even taking off your gloves. And because accidents in the field can happen, these tablets are also shock resistant and water and dust proof.

	FZ-M1	ZENIUS800
Processor	Intel Celeron® N2807 processor 1.58GHz 1MB L2 Cache	Qualcomm® Snapdragon™ 626 incorporating 8 Cortex-A53 cores up to 2.2 GHz each
Operating system	Windows® 8.1 Pro	Android™ 8.0 Oreo
Memory	2GB	4GB
Display	7" sunlight-viewable WXGA Active Matrix (TFT) IPS LCD with circular polariser (up to 500cd/m brightness); multi-touchscreen	8" Sunlight readable HD display with 1280 x 800 resolution and protected by Corning® Gorilla® Glass
Battery	Lithium-Ion (7.2V, 3320mAh)	8200 mAh 3.8 V Lithium-Ion battery (31.16Wh)
Operating time	Up to 7 h	Up to 15 hours
Navigation	???	Multi-constellation; single frequency GPS, GLONASS, Galileo, BeiDou
Camera	2 MP front/5MP rear	5MP front fixed focus/13MP rear with auto-focus
Features	WIFI, Bluetooth® 4.0, 4G LTE, USB, GPS external antenna connector	WIFI, Bluetooth®, Inbuilt GPS, 4G LTE cellular modem, High speed USB Type-C OTG port, MicroSD Card slot



GEOMAX SOFTWARE

GeoMax software solutions cover a wide range of professional surveying and construction applications. They are aligned to the workflows on sites, local needs and guide you through your task fast and intuitive.



GeoMax X-PAD Ultimate


The Ultimate solution in the field

X-PAD Ultimate ensures high productivity in the field. It supports perfect integration in your measuring instruments. Running on Android devices, it brings latest technologies to topography: a full 3D viewer, use of TPS, GNSS and other sensors, integration of your data into maps, in the camera for augmented reality, direct data exchange with cloud platforms, voice commands and much more. It is available in two tailored versions: one for surveyors and one for construction professionals.

Survey



Build

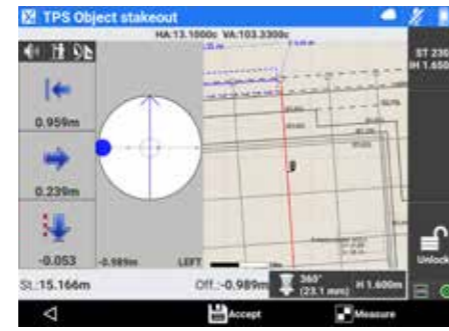

X-PAD Ultimate survey is the best solution for professional surveyors that need accuracy, complete features, flexibility, data integration, scalability and the latest technologies in the field. With a set of different modules, X-PAD Ultimate Survey covers all the needs in the field using TPS and GNSS instruments.

X-PAD Ultimate Build is the ideal solution for all your construction measuring and layout needs. It combines data collection from the total station or the GNSS, allowing you to perform the measurement, stakeout and as-built with simple and functional procedures.

X-PAD Build is a special and tailored version of X-PAD Survey, from which inherits all the main features and functionalities, but differs because it is specifically addressed to construction companies. To use X-PAD Build you don't need to be a surveyor; all procedures are guided and can also be used by those who use this type of equipment for the first time.

Thanks to our product specialists who daily discuss with you, our customers, dealers, end users all around the world, X-PAD Ultimate is kept up-to-date continuously and convinces with its perfect balance between clear structure, straight forward workflows and high functionality.

X-PERT - KEEP X-PAD AT ITS BEST

GeoMax X-PAD software has originally been developed taking your feedback aboard. To ensure that every new software feature is a perfect match with your needs, we exchange with you regularly. With SHIELD and X-PERT you receive new services that ensure you benefit from the latest improvements and have access to all X-PAD Ultimate software releases.



- Latest software releases, adjusted to the latest trends, your workflow and customised to you needs in the field
- Provides all software releases during certain periods automatically
- Delivered with the initial X-PAD Ultimate order
- Free of charge for the first year and can be renewed and purchased after license expiring



- Covers software maintenance (bug fixing)
- Always comes with all X-PAD Ultimate products free of charge.



X-PAD Ultimate offers to both platforms a specific working environment and a set of dedicated features

TOPOGRAPHIC 3D CAD - real topographic 3D CAD with specific functions to draw, edit, measure and calculate the position of new elements that can be then used in stakeout operations.

MAPS, WMS AND OFF-LINE - use different types of maps, online and offline

DATA COLLECTIONS. NOT ONLY COORDINATES - integrate the position, photos and notes to points. Quick Codes to create your own custom panels with the most used codes and measure automatically just after you choose the code.

STAKEOUT... WITH YOUR EYES CLOSED - Voice guidance to arrive at the point without even looking at the display. Large compass to simplify visual navigation. Every drawing element, including points, lines, arcs and every position, determined within the graphical view to staked out.

ROADING. THE WHOLE PROJECT IN THE CONTROLLER - load, manage and perform alignment, stakeouts of works such as roads, highways and canals.


TERRAIN SURFACES AND VOLUMES - can calculate terrain models from the points with the options to define breaklines and boundaries and the cubic metres of an excavation or a pit. Import models from DXF or LandXML files and use stakeout command to determine the design elevations in the field.

AUGMENTED REALITY. TURN ON REALITY! - Point the camera to the site and see immediately where the points and elements are for stakeout. X-PAD Ultimate will guide you in the vicinity of the point and then determine the exact location

BIM - Load and display IFC files in CAD view, survey, stakeout and COGO commands. Select, hide and isolate elements. or isolated. Extract points, lines, surfaces and cross-sections for stakeout and checking operations.

CLOUD AND SHARING POINT. FIELD AND OFFICE, ALWAYS CONNECTED - open and import any file, also in the cloud. Save your data on Dropbox, GoogleDrive and Microsoft OneDrive and access them from the field or office. Easily share any data via message or email.

X-POLE: ONE POLE, TWO SYSTEMS - The X-Pole solution allows you to work simultaneously with TPS and GNSS using the best features of each system and with maximum flexibility. The GNSS system positioned above the prism, gives you a direct rotation on the prism speeding up the locking operations after loss.

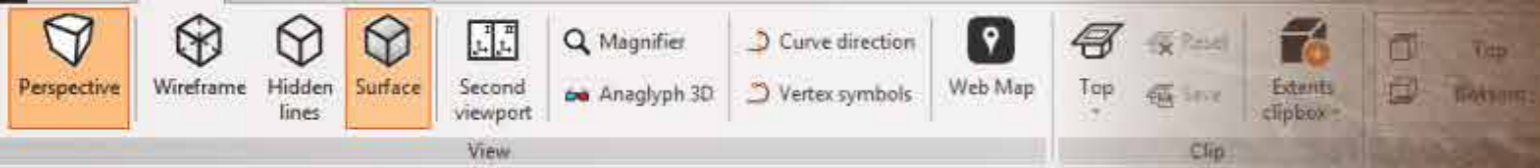

GeoMax X-PAD Office Fusion


The geospatial data office software

GeoMax X-PAD Office Fusion is a new concept with real integration of different information. Experience easy import of data, calculations, adjustments, scan registration and management of the clouds, points, measures, surfaces, BIM models, drawing and images, topographical utilities, and drawing functions - all in one.

X-TOPO: THE TOPOGRAPHIC MODULE

X-TOPO module allows to import the measurements from your instruments and have the full control of all the information to verify at any time the quality of your work; it calculates and solves all kinds of surveys, GNSS, total station, digital level and mixed with the least squared algorithms for precise calculation.

From topographic points or point clouds it is possible to create 3D models, contour lines, calculate cross-sections and volumes using several methods. Powerful tools and options allow you to customize the final drawings to obtain the best results possible for you customers.

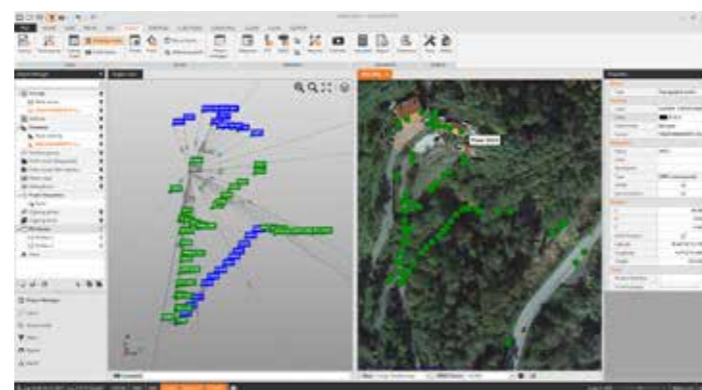


BIM CONNECT MODULE

Load and manage IFC files, extract elements for stake-out, and check as-built data with field measurements in the most efficient way.

X-SCAN: THE POINT CLOUDS MODULE

X-SCAN module allows to manage your point clouds data; robust algorithms are able to process point clouds and return the best results considering all the scans as a whole. Several options allow to improve the results according to the specific type of work and target recognition offers another way to have faster and better results. The automatic registration module is an irreplaceable tool that generate the final results with one single click. Orthophoto, cross-sections and surfaces can be generated them with very few and intuitive steps.

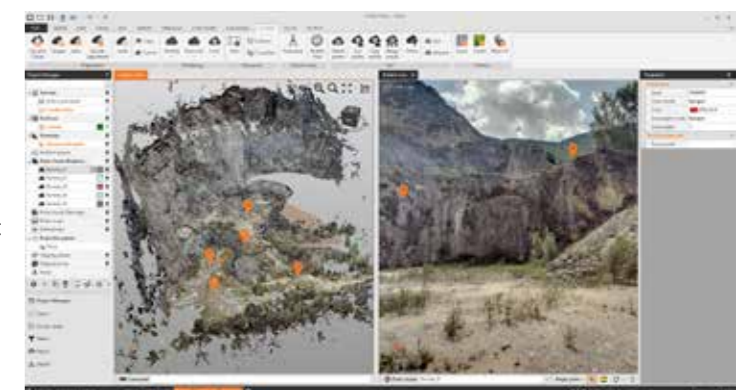

GeoMax X-PAD CalMaster

Efficient calibration for all your lasers



NEW BUSINESS OPPORTUNITIES

The GeoMax X-PAD CalMaster enables you to offer the complete construction laser service package to customers and solidify your professional reputation. Opening new value-added streams of service revenue, you can significantly reduce downtime with your own in-house calibration capability.

MAKE LIFE EASIER

Laser calibrations have never been that easy and fast to do. X-PAD CalMaster users can reduce their calibration time significantly by using the system. It enables a highly accurate method to calibrate construction lasers and can be operated without extensive training needed.

COMPLETE THE SYSTEM


The system runs on a X-PAD software that is well-known in the market for its user-friendliness and intuitive interface. Holding its promise, X-PAD CalMaster guides users step-by-step through the measuring workflow and supports them with instructions for accurate and fast measurements.

	GEOMAX ZONE SERIES	GEOMAX PIPE LASERS	3RD PARTY LASERS	3RD PARTY PIPE LASERS	3RD PARTY LINE/POINT LASERS
Issue calibration report	✓	✓	✓	✓	✓
Check plane laser beam	✓		✓		✓
Check spot beam	✓	✓	✓	✓	✓
Check grade 0.5%	✓		✓		
Check grade 1.0%	✓	✓	✓	✓	
Check grade 1.5%	✓		✓		
Guided calibration	✓	✓			
Live mode	✓	✓	✓	✓	✓

(including red, green and infrared lasers)

GeoMax Geo Office (GGO)

The ideal companion for your GeoMax equipment

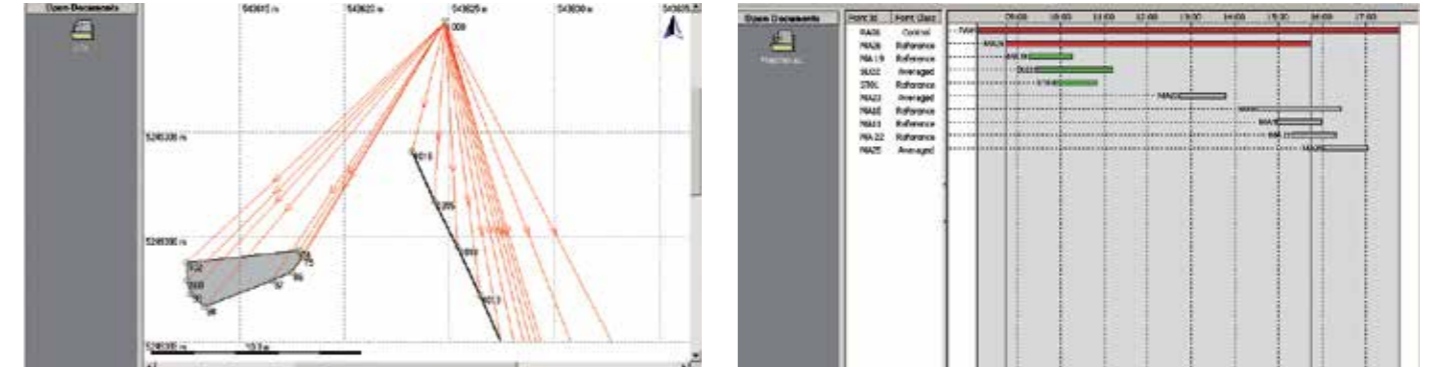

EASY-TO-USE

Following Microsoft Windows® standards, GeoMax Geo Office (GGO) is easy to use, even for novice PC users. Through the use of icons and graphics working with data in GGO is as easy as point and click.

RINEX IMPORT/EXPORT

Support of GNSS processing using multiple sensor brands is assured thanks the GGO's RINEX Import/Export option. By using the industry standard RINEX format you can import third party receiver data and post-process in GGO.

PREPARE, VISUALISE, EDIT

GGO has a full suite of tools that allow you to get the most out of your equipment before going on-site. Once you've completed your survey and seamlessly imported your field results into GGO, all observations are immediately available for visual confirmation of field activities. If errors or changes are found, they can be easily edited to deliver perfect results.

DATA PROCESSING AND REPORTING

When post-processing of GNSS data is required, GGO provides state-of-the-art technology to guarantee you always produce optimal results. Simply import data, and GGO will automatically process all possible GNSS baselines. Once results are available, they can be presented in customised reports.

LEAST SQUARES ADJUSTMENT

A rigorous 3D least squares adjustment package is available. This option allows the adjustment using least squares of GNSS, total station and combined data by using a variety of different parameters and coordinate systems. The results are stored in well-designed HTML report.

GeoMax FieldGenius Premium

Powerful field software for all your daily surveying tasks



DIGITAL TERRAIN MODELING, VOLUMES AND CONTOURING

FieldGenius has the ability to create and utilise DTM surfaces from existing survey data or create a DTM in real time as the data is collected. The TIN and contours will automatically update with each new shot.

POWERFUL ROADING

FieldGenius roading allows you to manually input or import your alignment data including centre line, vertical and template data. Stake your points along your alignment with confidence.

INSTRUMENT CONTROL AT YOUR FINGERTIPS

Total station and GPS functions are available on a common and easy-to-use instrument toolbar. Access measuring modes with the click of a button.

GEOMAX MICRO ROBOTIC SOLUTION WITH MASTERPLAN

The GeoMax Zoom3D and X-PAD MasterPlan software are your perfect partner for measurement and layout applications, indoors and outdoors.



GeoMax Zoom3D

Micro Robotic Solution with MasterPlan



Measurements and layout have never been so easy and fast. With an easy set-up, the intuitive GeoMax X-PAD MasterPlan Android™ software and one-man operation, the Zoom3D will speed up your daily work indoors and outdoors and bring the plan into the field.

X-PAD AND ZOOM3D – YOUR PERFECT SYSTEM

X-PAD is known for its user-friendliness and it's easy setup. X-PAD MasterPlan has been specifically designed to make the work with the Zoom3D as easy as possible and help professionals to modernise their business and improve their workflow efficiency.

With just a few steps, you are ready to measure. No matter if in dark or sunlight conditions, targeting on hidden points, or over short or long distances up to 50m, the Zoom3D offers many intelligent features to precisely target the aimed point. By pressing one key, the point is measured and visualised on your screen.




ONE-MAN LAYOUT

Increase your efficiency and increase productivity in your daily work. X-PAD MasterPlan includes an easy-to-use but powerful stakeout tool for the site layout. With the Zoom3D target recognition technology, you can measure and stake out using a pole by one person.

Easy leveling, plumbing points and staking out - the Zoom3D unique and user-friendly on board software comes with a full set of features that will speed up your outdoor and indoor applications.

AS-BUILT AND DRAWING IN ONE STEP

X-PAD MasterPlan features a full range of drawing tools. These features allow you to draw the 3D environment quickly and easily by using the Zoom3D's drawing function. The results can be exported in DXF or ASCII format. Draw 2D and 3D elements with the best results using the X-PAD MasterPlan. Get fast and exact results and all at the best price-to-performance.

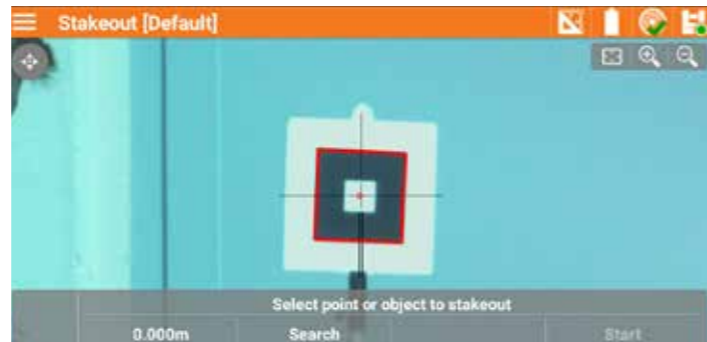

AUTOMATIC LINE AND SURFACE SCANS

When geometry becomes complex and surfaces are curved, Zoom3D measures horizontal, vertical and sloped sections automatically.

TECHNICAL DATA

Goniometer (Hz/V) range and accuracy	Horizontal 360°; Vertical 250°; 5", equates to 1.2mm @ 50m
Laser distance meter	Coaxial, visible red laser; Class 2; 650nm; < 1mW
Range	0.5 - 50m
Vertical/Horizontal field of view	Angle and distance combination @10m/1mm; @30m/2mm; @50m/4mm
Tilt sensor self-leveling range	± 3°



GEOMAX LEVELS

GeoMax levels make it easy to complete your daily leveling tasks on time with the highest accuracy. Rely on their comfort and robustness when working indoor or outdoor, even under challenging weather conditions.



GeoMax ZDL700

A digital level offering accurate results and fast operation



QUICK, EASY AND ERROR-FREE

The three-seconds measurement speed in combination with the simplicity of the one-push measure-and-store functionality allows fast and easy workflows.

LEAVE THE CALCULATOR IN YOUR POCKET

Execute all kind of calculations with GeoMax ZDL700. It is equipped with an onboard adjustment program, height difference calculations, an inverse staff measuring mode, and various measuring configurations. Thanks to digital readings and automated calculation, you will never again be slowed down by time-consuming calculator usage.

ACCURATE

Extensive field tests verify the excellent accuracy of the ZDL700 of 0.7mm for 1km double-run level. This makes the ZDL700 an ideal level not only for high performance leveling but also for deformation measurements and precise surveying, as well as general construction.

TECHNICAL DATA	
Height accuracy	± 0.7mm/km double run
Distance accuracy	D < 10m, 10mm D ≥ 10m, 0.001 x D
Maximum range	105m
Single measurement speed	< 3 seconds
Internal memory	2,000 measurements



GeoMax ZAL Series

Automatic levels covering from beginner to expert



Intensify your performance and get error-free results at the best price-to-performance ratio.

The GeoMax ZAL Automatic Level series are dependable and durable tools. Available for all skill levels, GeoMax levels enable all construction professionals to work correctly and economically.

With different types of magnification, an ergonomic and solid-built design, and full range of accessories and services, these automatic levels provide great quality at affordable value.



GeoMax ZAL300 Series
Professional/high precision



GeoMax ZAL200 Series
Professional/standard tasks



GeoMax ZAL100 Series
Economic choice/occasional use

TECHNICAL DATA	ZAL330	ZAL328	ZAL324	ZAL320	ZAL232	ZAL224	ZAL220	ZAL132	ZAL124	ZAL120
Accuracy Standard deviation 1km double-run leveling	1.2mm	1.5mm	2.0mm	2.5mm	1.9mm	2.0mm	2.5mm	2.0mm	2.0mm	2.5mm
Image	Erect	Erect	Erect	Erect	Erect	Erect	Erect	Erect	Erect	Erect
Magnification	30 x	28 x	24 x	20 x	32 x	24 x	20 x	32 x	24 x	20 x
Shortest target distance from instrument axis	0.8m	0.8m	0.6m	0.6m	1m	1m	1m	1m	1m	1m
Multiplication factor	100	100	100	100	100	100	100	100	100	100
Compensator working range/ setting accuracy	± 15'/0.3"	± 15'/0.3"	± 15'/0.5"	± 15'/0.5"	± 15'/0.5"	± 15'/0.5"	± 15'/0.5"	± 15'/0.5"	± 15'/0.5"	± 15'/0.5"
Circular level sensitivity	10'/2mm	10'/2mm	10'/2mm	10'/2mm	8'/2mm	8'/2mm	8'/2mm	8'/2mm	8'/2mm	8'/2mm
Protection	IP57	IP57	IP57	IP57	IP56	IP56	IP56	IP54	IP54	IP54

GEOMAX LASER ROTATORS & RECEIVERS

Suitable for a wide range of applications, GeoMax laser rotators are true multi-purpose tools.



GeoMax Zone Series

From start to finish, covering every need

Construction sites can differ drastically, from modest jobs to compound designs. Construction professionals need a tool with extensive range and capabilities to finish the job correctly and economically. The new and powerful GeoMax laser rotators portfolio offers the right construction laser for all trades and applications.

Solidly built and dependable in any element, the GeoMax lasers provide you long-lasting operation, the flexibility of a full range of interchangeable accessories to accommodate your unique work preference, and all at the best price-to-performance ratio.

IP68/67 PROTECTION

OUTSTANDING PRICE-TO-PERFORMANCE RATIO

DEPENDABLE IN ANY ELEMENT

INTERCHANGEABLE ACCESSORIES

SOLID-BUILT DESIGN

LONG-LASTING OPERATION

ERROR-FREE RESULTS

3/5 YEARS WARRANTY

LASER RECEIVERS

The GeoMax Zone Series comes with four laser receivers that will complement and boost your performance.



	ZRB90 BASIC	ZRP105 PRO	ZRD105 DIGITAL	ZRD105B
Working diameter	600m/2000ft	900m/3000ft	900m/3000ft	900m/3000ft
Detection window	80mm/3.1in	105mm/4in	105mm/4in	105mm/4in
Numerical readout	-	-	✓	✓
Beam catching	-	-	-	✓
Beam lock	-	-	-	✓

GeoMax Zone80 DG

Fully-automatic dual grade laser

Capable of operating at a speed of 20 rotations per second (rps), the Zone80 DG is a perfect fit for machine guidance solutions. With a laser beam that is stable over large distances, it

is especially suited for land leveling and agriculture applications. For optimal land use, Zone80 DG not only gives you a reference for horizontal planes but also for slopes up to 15%.



TECHNICAL DATA	
Functionality	Self-leveling horizontal digital slope in dual axis (full-automatic), Beam catch and Lock function
Operating range (diameter)	1100 m / 3600 ft
Self-leveling accuracy	± 1.5mm at 30m (±1/16" at 100ft)
Self-leveling range	± 5°
Grade range	Up to 15%
Rotation speed	300, 600, 1200rpm
Laser diode type/class	635nm (visible)/class 1
Batteries type	Li-Ion
Battery life	> 50h
Operating temperature	-20°C to 50°C
Protection	IP67
Warranty	5 years

GeoMax Zone60 DG

Fully-automatic dual grade laser

Fully-automatic grade laser specifically designed for construction workers who need the dependability and accuracy of a professional grade laser rotator on a daily basis. Align and

monitor the laser plane automatically by using the GeoMax ZRD105B receiver.



TECHNICAL DATA	
Functionality	Self-leveling horizontal, vertical, digital slope in dual axis (full-automatic), Beam catch and Lock function
Operating range (diameter)	900m/3000ft
Self-leveling accuracy	± 1.5mm at 30m (±1/16" at 100ft)
Self-leveling range	± 5°
Grade range	Up to 8%
Rotation speed	300, 600rpm
Laser diode type/class	635nm (visible)/class 1
Batteries type	Li-Ion
Battery life	> 40h
Operating temperature	-20°C to 50°C
Protection	IP67
Warranty	5 years

GeoMax Zone60 HG

Semi-automatic grade laser

Zone60 HG is made for exterior applications and is an ideal partner for concrete as well as formwork. With the slope function, time and temperature changes are frequently monitored to ensure accurate performance.



TECHNICAL DATA	
Functionality	Self-leveling horizontal, digital slope in dual axis (semi-automatic)
Operating range (diameter)	900m/3000ft
Self-leveling accuracy	± 1.5mm at 30m (±1/16" at 100ft)
Self-leveling range	± 5°
Grade range	Up to 8%
Rotation speed	300, 600rpm
Laser diode type/class	635nm (visible)/class 1
Batteries type	Li-Ion
Battery life	> 40h
Operating temperature	-20°C to 50°C
Protection	IP67
Warranty	3 years

GeoMax Zone20 HV

Automatic multipurpose laser rotator

This laser offers the Zone20 H basic specifications plus the capability of vertical leveling. Zone20 HV includes a long-range remote to adjust and align easily in any jobsite. The multipurpose laser for any craftsman.



TECHNICAL DATA	
Functionality	Self-leveling horizontal, vertical, 90° manual slope in dual axis
Operating range (diameter)	900m/3000ft
Self-leveling accuracy	±2.2mm at 30m (±3/32" at 100ft)
Self-leveling range	±5°
Rotation speed	120, 300, 600rpm
Scanning modes	10° - 35°
Laser diode type/class	635nm (visible)/class 2
Batteries type	Li-Ion
Battery life	> 40h
Operating temperature	-10°C to 50°C
Protection	IP67
Warranty	3 years

GeoMax Zone40 H

Best construction site laser rotator

Are you looking for performance and absolute dependability? GeoMax Zone40 H is the best construction site laser for rough environments. Combining solid-built housing with a powerful

dependable core, this laser is a long-term companion of choice for any heavy-duty leveling task.



TECHNICAL DATA	
Functionality	Self-leveling horizontal, manual slope in dual axis,
Operating range (diameter)	900m/3000ft
Self-leveling accuracy	± 1.5mm at 30m (±1/16" at 100ft)
Self-leveling range	± 5°
Rotation speed	600rpm
Laser diode type/class	635nm (visible)/class 1
Batteries type	Li-Ion
Battery life	> 40h
Operating temperature	-10°C to 50°C
Protection	IP67
Warranty	5 years

GeoMax Zone20 H

Automatic entry-level laser rotator

Economic and firm entry-level laser rotator, the GeoMax Zone20 H is designed with a solid-built housing and a straightforward interface. This laser offers all functions needed for regular and flexible use.



TECHNICAL DATA	
Functionality	Self-leveling horizontal, manual slope in dual axis
Operating range (diameter)	900m/3000ft
Self-leveling accuracy	±2.2mm at 30m (± 3/32" at 100ft)
Self-leveling range	±5°
Rotation speed	600rpm
Laser diode type/class	635nm (visible)/class 1
Batteries type	Li-Ion
Battery life	> 40h
Operating temperature	-10°C to 50°C
Protection	IP67
Warranty	3 years

GEOMAX PIPE LASERS

Consistent precision and accuracy are ensured by the compact, robust and fully featured GeoMax pipe lasers.



GeoMax Zeta125 Series

Versatile configuration, a full range of features, and designed for tough conditions

BUILT TO LAST

The robust and rugged design of the Zeta series has a proven IP rating for water and dust – so no matter how quickly water and dirt appear, the pipe laser will keep on working. The Zeta series are also equipped with a durable cast-aluminium housing that uses die casts and extrusions for superior strength.

ERROR-FREE WORK

Pipelining needs to be exact over long distances so with a guarantee of ± 10 arc sec. accuracy during leveling works and a grade setting control of up to 0.001 per cent, Zeta pipe lasers let you work close to error-free.


In addition to the accurate leveling core, Zeta125s model active cross axis compensation for any possible setup mistake.

SELF-LEVELING

Set the pipe grade from -10 per cent to +40 per cent.

VERSATILE CONFIGURATION

The GeoMax Zeta125 fits in tight bends and narrow manholes. Its slim build makes it suitable for pipes as small as 125mm diameter and the Zeta feet ensure users continue working in most any site situation.

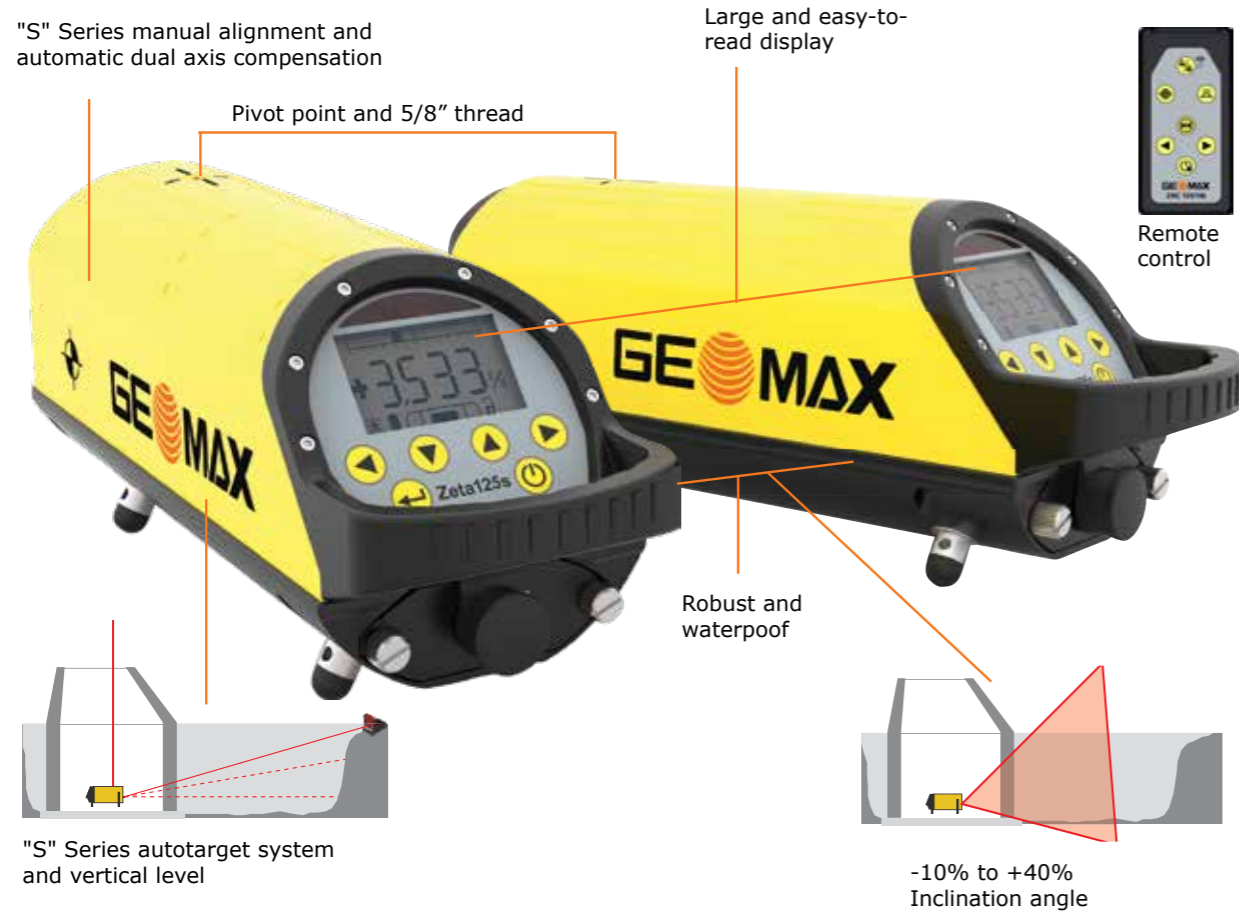

THE SMALLEST DIAMETER

The Zeta125 fits in tight bends and narrow manholes. Due to its slim housing, it is suitable for pipes with 125mm (5") diameter. Thanks to its weight and the rubber feet, Zeta laser series have a stable stand on any pipe material.



TECHNICAL DATA	ZETA125	ZETA125 US	ZETA125S
Self-leveling/grade range	+45% to -15%/+40% to -10%		
Accuracy	± 5 mm at 100m ($\pm 1/16"$ at 100'); ± 10 arc sec.; $\pm .005\%$		
Cross axis leveling	Manual		Automatic (6°)
Vertical level/Autotarget/Manual alignment	-	-	✓
Laser Class	2	3R	3R
Protection class	IP68		
Power supply/battery life	Rechargeable lithium ion battery pack; 110/230V AC converter (charge and run simultaneously); 12V power cord/40h Li-Ion battery		

GEOMAX MACHINE GUIDANCE

No more intuitive guesswork or costly and difficult-to-install-and-operate machine control systems. GeoMax has an easy and accurate way to guide excavators.



GeoMax MR240

Ideal for use with backhoes and mini-excavators

The GeoMax MR240's LED indicators show the position of cutting edge in relation to laser reference beam. The MR240 has three indicators in coarse mode, up to five in fine mode and is equipped with magnet mount with extra strong rare earth magnets.

- Accurate grade information for all visual machine control applications
- Extra strong rare earth magnets
- Rugged and waterproof design

TECHNICAL DATA	
Range	200m
Accuracy	Fine 6mm Coarse 30mm
Reception angle	240°
Reception height	14cm
Power	3 x AA batteries, 1,5V
Battery life	130h
IP protection	IP67
Weight w/o battery	2.2kg
Size	220x120x100mm

GeoMax MR360R

Accurate grade information for all visual machine control applications

The GeoMax MR360R's large 360° detection windows pick up any rotating laser from any angle. The MR360R incorporates a built-in vertical indicator that monitors angle of the stick, signalling of the stick and signals if it is plumb or under/over extended. The remote display shows direction arrows for plumbing up the dipper stick.

Its receiver has plumb LED indicator, and its magnet mount allows quick setup and easy movement from machine to machine.

Clamp mount also available.

- 360° detection windows for total coverage
- In-cabin remote display for best control
- On operations
- No cables required

TECHNICAL DATA	
Range	200m
Accuracy	Fine 6mm Coarse 12mm
Reception angle	360°
Reception height	25cm
Power	NiMH rechargeable batteries
Battery life	130h
IP protection	IP67
Weight w/o battery	1.8kg
Size	375"x75x107mm



GEOMAX CABLE LOCATORS

Increase on-site safety, minimise human error, and save time and money.





GeoMax EziSystem

Increase safety, decrease costs

Every year many site workers are injured and equipment is damaged due to accidentally striking buried cables and pipes. As the complexity of large underground networks continually increases, knowing the location of buried cables and pipes prior to excavation work has never been so important.



EZISYSTEM I-SERIES

Easily avoid buried cables and pipes before excavation work

The EZiSYSTEM cable avoidance equipment makes locating buried cables and pipes easy and efficient. With an EZiCAT i-Series locator, there is no need to manually adjust the sensitivity. With the unique Automatic Pinpointing feature, users can simply press the trigger and start locating.

EZISYSTEM XF-SERIES

Easily locate and trace buried utilities over greater distances

The EZiSYSTEM xf-Series utility locating and tracing equipment makes locating buried utilities easy and efficient. The xf-Series locators have additional low frequencies enabling you to locate and trace utilities over longer distances and in congested environments.



BENEFITS OF DATA LOGGING IN 5 STEPS

- Conduct ground survey gathering data
- Send logged data to Bluetooth® enabled PC
- View EZiCAT usage statistics and charts
- Make informed decisions to efficiently manage EZiCAT fleet and operators
- Implement changes to procedures for better results

X-PAD VU - CABLE LOCATOR SOFTWARE

X-PAD VU allows an easy analysis of activity data from EZiCAT cable locators. Simply download the data via Bluetooth to see how the data survey was conducted and issue reports of the collected data. The software can be used with all EZiCAT i700 as well as previous models of EZiCAT i600 Series.

The software allows to analyse the following traceable data:

- GPS positioning of use
- Time and date of use
- Usage duration
- User identification
- Used detection modes
- Detected buried utilities
- Display of calibration dates



X-PAD VU allows a map view of the GPS-enabled locators, a detailed dashboard analysis, and the issuing of summary as well as incident reports.

A collection of colorful hard hats (yellow, white, green, blue) is arranged on a wooden surface. The blue hard hat in the foreground is the most prominent, showing its textured surface and ventilation slots. Other hats are visible in the background, slightly out of focus.

GEOMAX ACCESSORIES & QUALITY MANAGEMENT

GeoMax equipment is built with the intention to withstand all conditions you run into during your daily work.

GeoMax Accessories

GeoMax accessories have been individually tested to provide you the best performance and reliability during all your daily tasks. You can be assured that the complete range of GeoMax accessories is of quality that meets the highest demands and

simply "works when you do." This is a selection of our current accessories portfolio. Ask your local GeoMax representative for additional options.



ZTW100

- Wooden tripod
- Shoulder strap and side clamp screws
- Packaged length 104cm extended length to 166cm
- Weight 5.7kg



ZTA100

- Aluminium light weight tripod
- Shoulder strap and side clamp screws
- Packaged length 105cm extended length 167cm
- Weight 4.5kg



CT160

- Aluminium tripod
- Shoulder strap and screws
- Range from 103cm up to 167cm
- Medium weight



ZCA102

- Reflector carrier
- Tubular level
- Optical plummet for precise positioning



ZCA100

Tribach carrier for GNSS antennas.



ZCA101

Tribach carrier with stub for prisms.



ZPC200

- Telescopic carbon fibre
- Aluminium pole for GNSS
- Extends to 230cm



ZPC201

- Telescopic carbon fibre
- Aluminium pole for TPS
- Extends to 230cm



ZPC202

- GNSS pole
- Length 25cm
- For mounting Zenith receiver on carrier as extension for base setups



ZST100

- Telescopic
- Dual-strut pole support
- Suitable for all GeoMax poles and level staffs



ZPT4

- Mini TPS pole
- Four screwable segments
- Extends to 30cm
- With a pin


TOTAL STATION, CONTROLLER & DIGITAL LEVEL CABLES

Zoom10		USB Cable for Zoom10	ZDC10
Zipp10 Pro/Zoom40	USB	Cable mini-USB to USB host connecting to a PC/tablet	ZDC301
Zoom25/50	USB	Cable Lemo-USB connecting to a PC/tablet using USB transfer technology	ZDC217
ZDL700	USB	Cable: Lemo-USB connecting ZTS600 & ZDL700 to PC/tablet	ZDC102

GNSS CABLES

ZENITH15/25 PRO	RS232	Cable Lemo-RS232 connecting to a PC/tablet	ZDC227
	USB	Cable Lemo-USB connecting to a PC/tablet	ZDC226
ZENITH35 PRO	Satel EA-SyPro/battery	Y-Cable Lemo to Lemo and clamps connecting with Satel EASyPro radio and external battery for power supply	ZDC225
	USB/RS232	Y-Cable Lemo to USB and RS232 for Zenith35	ZDC509
	Satel EA-SyPro/battery	Y-Cable Lemo to Lemo and clamps connecting with Satel EASyPro radio and external battery for power supply.	ZDC221

GeoMax Accessories

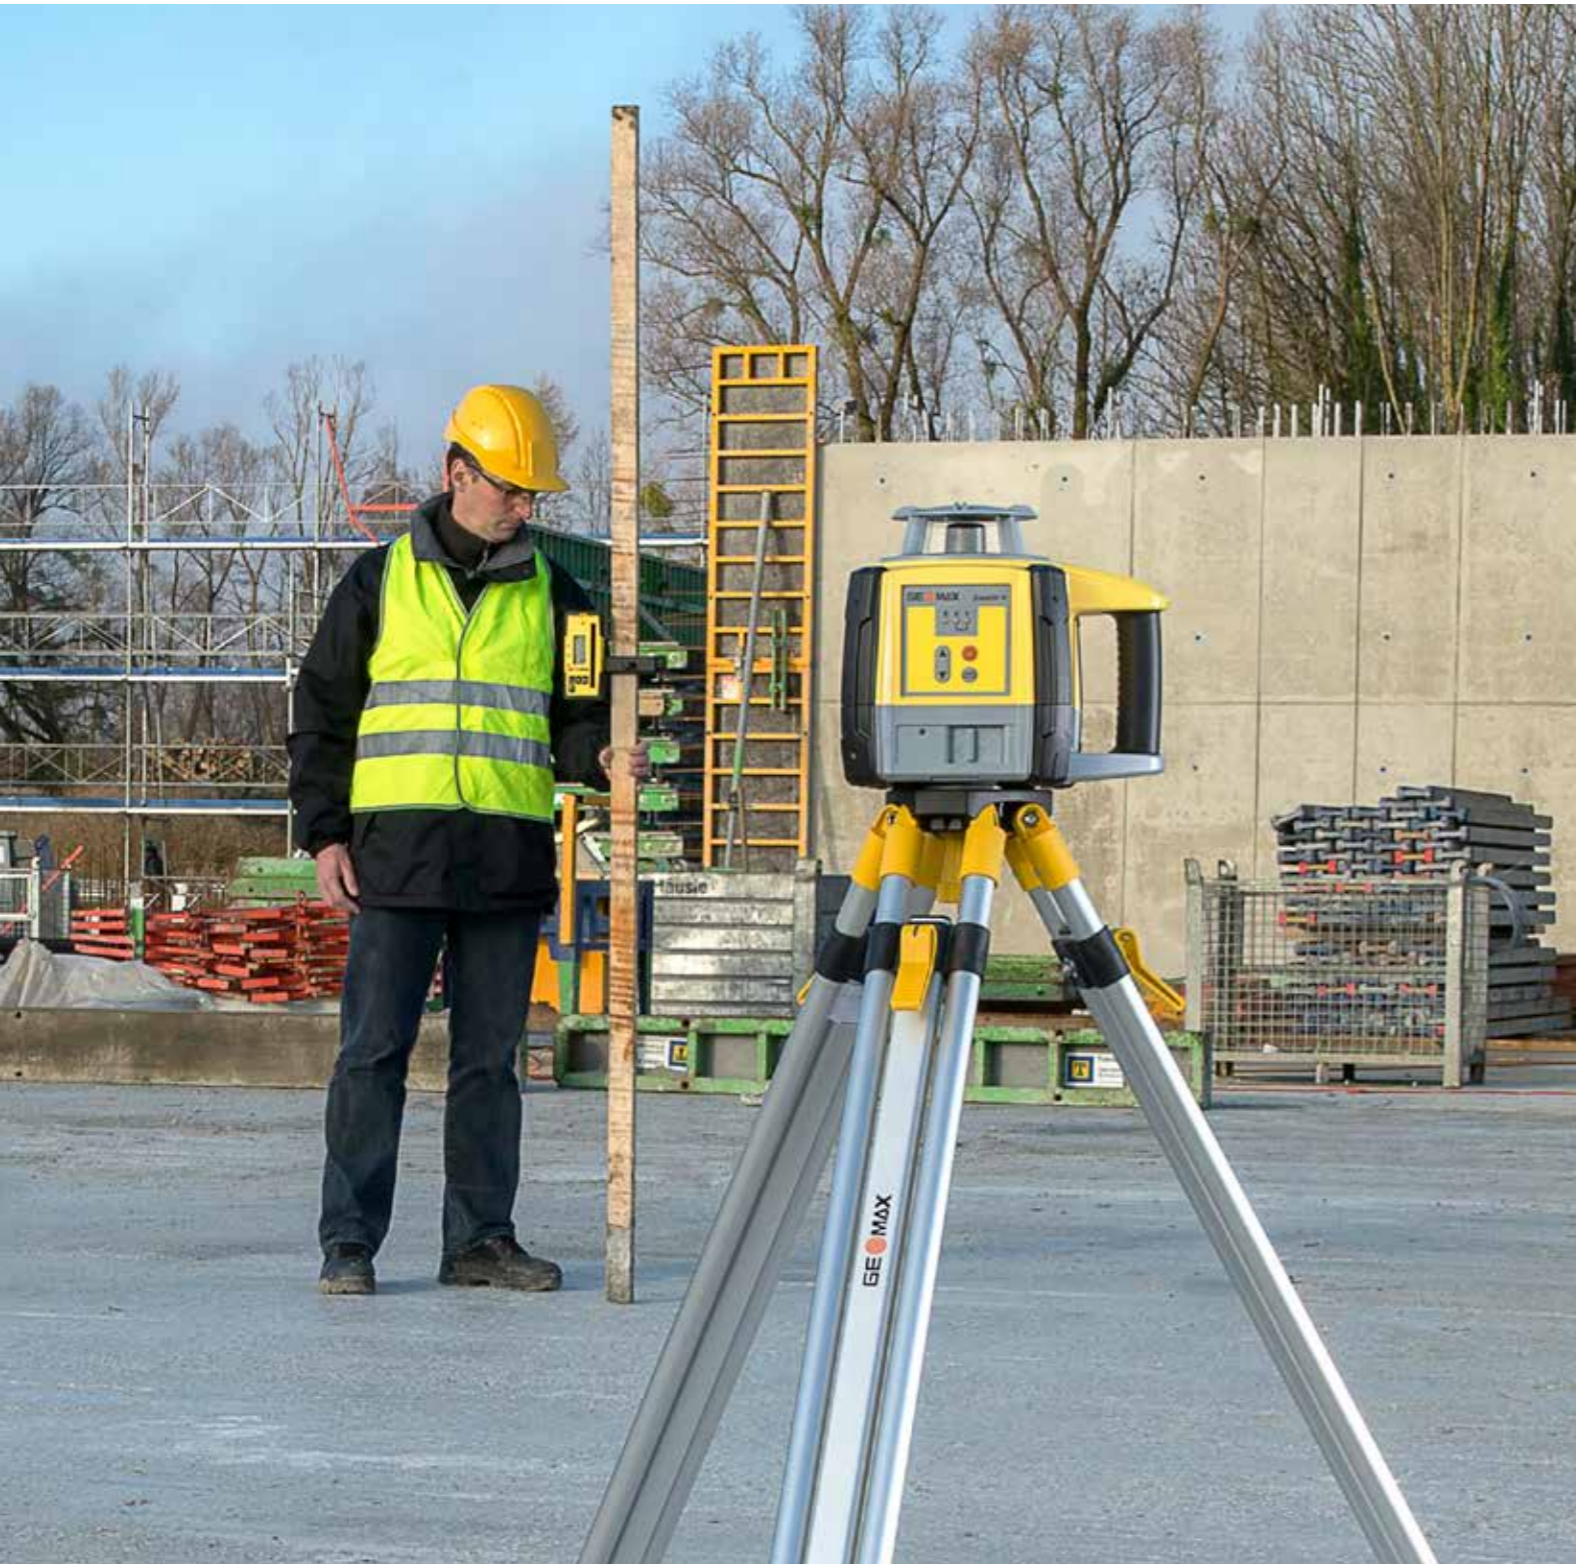

GNSS Accessories



8246637



833688



833645


GNSS CARBON FIBER POLES	Bag	1.8 M	2 M	2.2 M	Part No.
GNSS Snap Lock Carbon Fiber Pole with Locking hole	•	•	•		8246637
GNSS Snap Lock Carbon Fiber Pole with Locking hole	•	•	•	•	8246638
GNSS ROVER RODS	Bag	1.8 M	2 M	2.2 M	Part No.
GNSS Aluminum Rover Rod 2 Section - Yellow	•		•		833688
GNSS Carbon Fiber Rover Rod 2 Section	•		•		833645

GNSS RADIO ANTENNA MAST	Part No.
6 ft Snap Lock Radio Antenna Mast	8246329



8246329

Tripods



Medium Weight Aluminum Tripod Domed Head

833662

ALUMINUM TRIPODS	Clamp type	Head	Height	Collapsed	Head Size	Weight	Gross Weight	Part No.
Light Weight Aluminum Tripod - Yellow	Quick Clamp	Flat	63in	39in	5in	7lbs	8lbs	833652
Medium Weight Aluminum Tripod - Orange	Quick Clamp	Flat	67in	43in	6in	10lbs	11lbs	833653
Medium Weight Aluminum Tripod - Black	Quick Clamp	Flat	67in	43in	6in	10lbs	11lbs	833654
Medium Weight Aluminum Tripod - Yellow	Quick Clamp	Flat	67in	43in	6in	10lbs	11lbs	833655
Medium Weight Aluminum Tripod - Yellow	Twist Lock	Flat	67in	43in	6in	10lbs	11lbs	833656
Medium Weight Aluminum Tripod - Black	Twist Lock	Flat	67in	43in	6in	10lbs	11lbs	833657
Medium Weight Aluminum Tripod - Yellow	Quick Clamp	Domed	67in	43in	6in	10lbs	10lbs	833662
Aluminum Heavy Duty Square Dowel - Black	Quick Clamp	Flat	64in	41in	6in	9lbs	11lbs	837917
Heavy Duty Aluminum Tripod - Black	Dual Clamp	Flat	70in	41in	6in	18lbs	20lbs	8246319



833653



833654



833655



837917



8246319

MATERIAL TYPE	Recommended Environments
Wood	Dry
Aluminum	All
Wood Fiberglass	All
Carbon Fiber	All

TRIPOD TYPE	Recommended Instruments
Light Weight	Auto Levels Rotating Lasers
Medium Duty	Premium Lasers Theodolites Total Stations
Heavy Duty	Robotic Total Stations Scanners
Elevating	Premium Rotating Lasers Machine Control

Tripods




Heavy Duty Fiberglass Tripod Round Head Dual Clamp

8248660

ELEVATING TRIPODS	Clamp type	Head	Height	Collapsed	Head Size	Weight	Gross Weight	Part No.
9 ft Elevating Aluminum Heavy Duty Tripod - Orange	Dual Clamp	Flat	108in	55in	6in	16lbs	20lbs	8246320
12 ft Elevating Aluminum Heavy Duty Tripod - Orange	Dual Clamp	Flat	144in	64in	6in	21lbs	28lbs	8246321
FIBERGLASS TRIPODS	Clamp type	Head	Height	Collapsed	Head Size	Weight	Gross Weight	Part No.
Heavy Duty Fiberglass Tripod - Black	Dual Clamp	Flat	69in	43in	6in	20lbs	22lbs	833658
Medium Duty Wood Fiberglass Tripod - Black	Twist Lock	Flat	70in	43in	6in	18lbs	20lbs	833660
Medium Quick Wood Fiberglass Tripod - Black	Quick Clamp	Flat	70in	43in	6in	18lbs	20lbs	833661
Heavy Duty Fiberglass Tripod - Black	Dual Clamp	Round	69in	43in	6in	20lbs	22lbs	8248660
WOOD TRIPODS	Clamp type	Head	Height	Collapsed	Head Size	Weight	Gross Weight	Part No.
Heavy Duty Wood Tripod with Tool kit - Yellow	Dual Clamp	Flat	69in	43in	6in	18lbs	20lbs	833659



833659

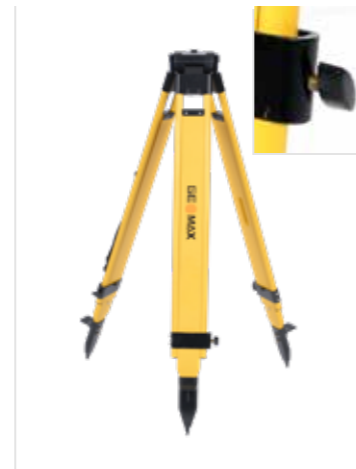

833660

TRIPOD ACCESSORIES	Part No.
Tripod Stabilizer	835661



833661



8246320



833658

MATERIAL TYPE	Recommended Environments
Wood	Dry
Aluminum	All
Wood Fiberglass	All
Carbon Fiber	All

TRIPOD TYPE	Recommended Instruments
Light Weight	Auto Levels Rotating Lasers
Medium Duty	Premium Lasers Theodolites Total Stations
Heavy Duty	Robotic Total Stations Scanners
Elevating	Premium Rotating Lasers Machine Control

Prism Poles and Accessories

PRISM POLE ACCESSORIES	Part No.
Topographic Shoe Regular	838345
Wide Base Topo Shoe	841008
Replacement Point (Bipod, Range Pole, Prism Pole)	838346
5/8ths x 11 female to quick release male adapter (Swiss style tip to 5/8 thread)	8246328
2 Piece Quick Release Assembly 5/8ths x 11 Threads (from 5/8 to Swiss style tip)	8246595
70mm Adapter GNSS to Swiss style prism	8249459
Prism Pole Display Stand	840865
PRISM POLE BRACKETS	Part No.
N4 Cradle and Pole Clamp Assembly	8246596
Cradle only for Allegro2 & Surveyor2	8246706
Clamp Only for Allegro2 and Surveyor2	8248868



838345



838346



8246328



840865



8246595

Prism Pole Bipods

PRISM POLE BIPODS	Part No.
Prism Pole Bipod - Red	833642
Prism Pole Bipod - Yellow	833682
Carbon Fiber Bipod	833687
Mini Prism Pole Bipod - Red	833643
Mini Bipod for mini stake out poles	8246636



833687



833642



8246636

CARBON FIBER TRIPODS	Part No.
Carbon Fiber Thumb Release Tripod	833689



POLE PEG ADJUSTING JIG	Part No.
Pole Peg Adjusting Jig	833649



RANGE POLES	Part No.
4 ft Range Pole with Point	833646
8 ft Range Pole 2 Sections with Point	833647
12 ft Range Pole 3 Sections with Point	833648



833647

Rods


FIBERGLASS RODS	Inches	Tenths	Part No.
8 ft Fiberglass Rod		●	8246807
13 ft Fiberglass Rod	●		833670
13 ft Fiberglass Rod		●	833671
16 ft Fiberglass Rod	●		833672
16 ft Fiberglass Rod		●	833673
20 ft Fiberglass Rod	●		833674
20 ft Fiberglass Rod		●	833675
25 ft Fiberglass Rod	●		833676
25 ft Fiberglass Rod		●	833677



833671

833673

ALUMINUM RODS	Inches	Tenths	Part No.
13 ft Aluminum Rod	●		833678
13 ft Aluminum Rod		●	833679
16 ft Aluminum Rod	●		833680
16 ft Aluminum Rod		●	833681



833681

DIRECT READING RODS	Inches	Tenths	Part No.
10 ft Direct Elevation Optical Rod GR10T		●	825488
10 ft Direct Reading Laser Rod w/ Receiver Guide GR1000T		●	825487
10 ft Direct Read Cut & Fill Rod GR1000		●	825486



825487



825486



825488



825489



8246886



833650



8247112

ROD ACCESSORIES	Part No.
UB-1 Universal Bracket	825489
Rod Level	833650
B-Storm Bracket	8246886
B1-LS70-80 Mounting Bracket	8247112
GR1450 15 ft Cut/Fill Rod	8238735
Fiberglass & Aluminum Rod Stand	8246601

ROD ACCESSORIES	Inches	Tenths	Part No.
Replacement Tape for 825487 Direct Elevation Laser Rod	●		845724
Replacement Tape for 837885 10 ft Direct Elevation Rod	●		870168

SK Rods

OVAL LEVEL RODS	Inches	Tenths	Part No.
25' SK Fiberglass Oval Level Rod, 7 sections	●		834728
25' SK Fiberglass Oval Level Rod, 7 Sections		●	834730
32' SK Fiberglass Oval Level Rod, with attached footplate		●	834731
REPLACEMENT SECTIONS*	Inches	Tenths	Part No.
No 1 Section 25' SK Fiberglass Rod (Bottom)		●	8246392
No 2 Section 25' SK Fiberglass Rod		●	8246393
No 3 Section 25' SK Fiberglass Rod		●	8246394
No 4 Section 25' SK Fiberglass Rod		●	8246395
No 5 Section 25' SK Fiberglass Rod		●	8246391
No 6 Section 25' SK Fiberglass Rod		●	8246389
No 7 Section 25' SK Fiberglass Rod		●	8246390



834730

*ONLY for 25' SK Fiberglass Oval Level Rod #834730

Prism Poles

COMPRESSION LOCK PRISM POLES	Bag	Part No.
8.5 ft Compression Lock Prism Pole Adjusting Tip Dual Graduations	●	833633
12 ft Compression Lock Prism Pole Adjusting Tip Dual Graduations	●	833634
15 ft Compression Lock Prism Pole Adjusting Tip Dual Graduations	●	833635



833633

KNOB LOCK PRISM POLES	Bag	Part No.
8.5 ft Knob Lock Prism Pole Adjusting Tip Dual Graduations	●	833636
12 ft Knob Lock Prism Pole Adjusting Tip Dual Graduations	●	833637
15 ft Knob Lock Prism Pole Adjusting Tip Dual Graduations	●	833638



833636

KNOB LOCK PRISM POLES	Bag	Part No.
8.5 ft Quick Release Prism Pole Adjustable Tip Dual Graduations	●	833639
12 ft Quick Release Prism Pole Adjustable Tip Dual Graduations	●	833640
Yellow Mini Stake Out Pole	●	833684



833639



833684

Tribrachs and Adapters

TRIBRACHS	Part No.
Laser Plummet Tribrach - Black	833663
Optical Plummet Tribrach - Black	833664



833663



833664

TRIBRACH ADAPTERS	Part No.
Tribrach Adapter with Removeable Center	833667
Tribrach Adapter Friction Rotatable	833668



833667



833668

TRIBRACH CARRIERS	Part No.
Tribrach carrier for GNSS antennas	760269
Tribrach carrier with stub for prisms	765618
Reflector carrier with tubular level and optical plummet, for precise positioning	765606



760269



765618



765606

Prisms

STANDARD PRISMS	Part No.
Copper Coated Prism 62mm	833617

*See Prism Cannister below in Prism Assembly picture



833617

MINI PRISMS	Part No.
Mini Prism System with Non-Adjustable Side Vial - Orange	833685
Mini Prism System with Non-Adjustable Center Vial - Orange	833686



833685

833686

TILTING PRISMS	Part No.
Tilting Prism Assembly with 5 1/2 x 7 target - Florescent orange	833626
Tilting Prism Assembly with 5 1/2 x 7 target - Florescent yellow	833627



833626

833627

FIXED PRISMS	Part No.
Fixed Single Prism	8247015



8246534

Measuring Supplies

POWER TAPES	Standard	Metric	Part No.
1" x 25' Self Lock Engineer Power Tape	•		833690
1" x 25' Professional Nylon Coated Blade High Viz Inch Power Tape	•		833691
1" x 33' Professional Nylon Coated Blade High Viz Inch Power Tape	•		833692
25' Lacquer Coat Steel Blade	•		8246514
25' Lacquer Coat Steel Blade	•		8246515
NYLON REINFORCED STEEL HIGH SPEED REWIND	Standard	Metric	Part No.
100' Double Nylon Coated Tape 3x1 Rewind Measure with Hook	•	•	8246520
300' Double Nylon Coated Tape 3x1 Rewind Measure with Hook	•	•	8246528
300' Double Nylon Coated Tape 3x1 Rewind Measure with Hook	•		8246529
200' Double Nylon Coated Tape 3x1 Rewind Measure with Hook	•	•	8246545
NYLON REINFORCE STEELBLADE STANDARD REWIND	Standard	Metric	Part No.
100' Double Nylon Coated Steel Tape with Hook	•	•	8246522



833690



833691



833692



8246522

Measuring Supplies

MEASURING WHEELS	Feet & Inches	Feet & Tenths	Feet, Tenths & Hundreds	Part No.
3 Inch Professional Wheel with Telescoping Handle	•			8246510
3 Inch Professional Wheel with Telescoping Handle		•		8246511
POCKET RODS	Feet & Inches	Feet & Tenths	Feet, Tenths & Hundreds	Part No.
Pocket Rod		•		8246533
Engineers Wood Ruler			•	8248718



8246510



8246511



8246533

TALLY METER	Part No.
Hand Held Tally Meter	8246534



8246534

CHAINING PINS	Part No.
14 inch Chaining Pins (Set of 11)	833669



833669

Marking Supplies

DIXON LUMBER CRAYONS & ACCESSORIES	Part No.
Dixon Lumber Crayon Holder	838395
Dixon Lumber Crayons - Yellow (Package of 12)	838400
Dixon Lumber Crayons - Blue (Package of 12)	838436
Dixon Lumber Crayons - Red (Package of 12)	838438
DIXON LUMBER CRAYONS & ACCESSORIES	Part No.
Premium Scribe 5 in	8246176
Giant Scribe	8246175
Replacement Tips for Premium & Giant Scribes (6 per package)	8246177
DIXON Markers	Part No.
Dixon RediMark Metal Markers - Black (Package of 12)	838396
Ideal Markers & Accessories	Part No.
Ideal Marker Black Replaceable Tip	838444
Replacement Bullet Tip (12 tips per package)	838446
Replacement Chisel Tip (12 tips per package)	838447



838396



838444



8246177



8246175



838446

Misc.

PLUMB BOBS	Part No.
18 oz Plumb Bob	840460
Plumb Bob Point	840463



840460



840463

HEAVY DUTY BAGS	Part No.
Heavy Duty Triple Prism / Backsight System Bag	8247142



8247142

AUTO LEVELS	Part No.
32x Automatic Level	838332




838332



HAND LEVELS	Part No.
2X KR Hand Level 5-7 inch	8246480



8246480



765611

REFLECTIVE TARGETS	Part No.
Self-adhesive reflective target 6x6 cm. For measurement of surfaces with standard EDM. Constants GeoMax + 34.4 Absolute 0.0	765611

TRANSIT & FIELD BOOKS	Part No.
Transit Field Book (4 1/2 x 7 1/4 in)	839912
Mining Transit Book (4 1/2 x 7 1/4 in)	839915
Engineer's Field Book (4 1/2 x 7 1/4 in)	839916
Level Book (4 x 6 1/2 in)	839917
Level Book (4 1/2 x 7 1/4 in)	839918
Field Book (4 1/2 x 7 1/4 in)	839919
Cross Section Book (6 1/2 x 8 1/2 in)	839920



839912



839915



839916




839917



839918



839919



839920

TOTAL STATION SUPPLIES	Part No.
Diagonal eye piece for Zoom20 non-pro / Zoom30 non-pro / Zoom35 pro / Zoom80 / Zoom90	767428
Diagonal eye piece for Zipp10 / 10 Pro / Zipp20 / Zoom20 Pro / Zoom30 Pro	793978



767428



793978

DATA COLLECTOR BAGS	Part No.
Large Data Collector Case with Belt Loop	8247548



8247548

Replacement Parts

Available upon Request



REPLACEMENT PARTS	Part No.
Button Set for Fiberglass Rods	8246718
Cap for Square Fiberglass Rods	8246808
Bubble for Quick Release Prism Pole	8246845
Bubble for Compression Lock Prism Pole	8246844
Foot Assembly for Wood Fiberglass Tripod	8246966
Strap for Wood Fiberglass Tripod	836750
Bubble for Tribrach	836751
Prism Pole Bubble only	836752
Clamp Lever for Wood Fiberglass Tripod	836753
Clamp Lever Medium Quick Clamp Tripod	836749
Bottom Section for 833673 Fiberglass Rod Tenths	8248705
Tripod Point for 833661	8248770
Tripod Screw for 833661	8248771

REPLACEMENT PARTS	Part No.
Dowel Cap Bottom Insert for 833661	8248769
Center Guide for Medium Aluminum Tripods	8246615
Center Guide for Wood Fiberglass Tripods	8246639
Button Set for Aluminum Rods	8247723
Button Set for Fiberglass Rods	8246718
Cap for Square Fiberglass Rods	8246808
Bubble for Quick Release Prism Pole	8246845
Bubble for Compression Lock Prism Pole	8246844
Foot Assembly for Wood Fiberglass Tripod	8246966

GeoMax Services



GEOMAX ACADEMY

Within the GeoMax Academy, the company offers excellent training opportunities for GeoMax dealers. Training is provided worldwide with a focus on hardware and software. Training sessions take place in a variety of locations around the world and feature detailed information about applications and products



within the GeoMax portfolio. Training takes account of the latest technological advances in the survey and construction business. Training is also carried out regionally, to cover specific requests. A dedicated team prepares tailor-made classes to help regional sales organizations meet local needs. If you are interested in our training, please contact: academy@geomax-positioning.com



GeoMax Quality Management



BUILT FOR ALL ENVIRONMENTS

With the design criteria "works when you do," GeoMax products are built to withstand all environmental conditions. GeoMax equipment is built with the intention to withstand all conditions you run into during your daily work. Rain, hail, snow or intense heat will never affect your GeoMax equipment - you can always keep working to get the job done.



OUR COMMITMENT TO SAFETY AND THE ENVIRONMENT

All GeoMax products are fully CE (Conformité Européenne) as well as RoHS (Restriction of the use of certain hazardous substances in electrical and electronic equipment) and WEEE (Waste from Electrical and Electronic Equipment) conformant.



OUR COMMITMENT TO QUALITY

The internationally active Swiss Association for Quality and Management Systems SQS, as well as the International Certification Network IQNET certified that GeoMax AG meets the requirements of ISO9001, Quality Management System and ISO14001, Environmental Management System.

- Certified area: Whole company.
- Field of activity: Development, manufacture, distribute, support and service of products, precision tools and systems for geomatic, industrial and construction applications.



EXPERTISE AT YOUR SERVICE

We care for your work and want your GeoMax laser tools to stay operational for as long as you work. To ensure this, we support you with our highly skilled service centres around the world offering the following services for the lifetime of your product:

- Repair and maintenance of lasers and accessories
- Re-calibration
- Cleaning and general servicing of all product parts
- Functional testing and product safety

Distance meter (Reflector mode): Laser class 1 in accordance with IEC 60825-1 resp. EN 60825-1
 Laser plummet: Laser class 2 in accordance with IEC 60825-1 resp. EN 60825-1
 Distance meter (Reflectorless mode accXess™): Laser class 3R in accordance with IEC 60825-1 resp. EN 60825-1

Windows® CE, Windows® 7, Windows® Embedded, and Windows® Mobile are registered trademarks of Microsoft Corporation.
 The Bluetooth® word mark and logos are owned by Bluetooth SIG.
 NovAtel On board® is a registered trademark of NovAtel Inc.
 Other trademarks and trade names are those of their respective owners.

GeoMax Selection of our portfolio:



X-PAD Ultimate



Total Stations



GNSS



Laser Rotators



Locators



Zoom3D



Zeta125 Series



Field Controller



Digital level

GEOMAX Authorized DISTRIBUTION PARTNER

09/19/768325 en Copyright GeoMax AG.
Illustrations, descriptions and technical specifications are not binding and may change. All trademarks and trade names are property of their respective owners.